

SYLVEO LED 20000LM ROAD ASYMMETRIC 4K DALI  
0049147



Features

- Exterior LED floodlight, comes complete with a 1000mm cable and adjustable bracket, aluminium housing, clear glass diffuser, 21542lm, 201W, 107lm/W, 4000K, 5002mA, CRI70, 52°x117° beam angle, DALI dimmable, IP66, IK08, Class I, 50000hrs, (LxWxD) 98x496x392mm


Product Overview

|                                 |                                            |
|---------------------------------|--------------------------------------------|
| Product name                    | SYLVEO LED 20000LM ROAD ASYMMETRIC 4K DALI |
| Technology                      | LED                                        |
| Housing                         | Aluminium                                  |
| Mount                           | Wall surface mounted                       |
| Fixture rating                  | Enclosed                                   |
| General application             | Logistics & Industry                       |
| ETIM Class                      | EC001744                                   |
| E-number FI                     | 4579405                                    |
| E-number SE                     | 7764813                                    |
| Fixture luminous flux (lm)      | 21542                                      |
| Luminaire efficacy (lm/W)       | 107                                        |
| LOR (%)                         | 100                                        |
| Colour temperature (K)          | 4000                                       |
| Light colour                    | Neutral White                              |
| CRI (Ra)                        | 70                                         |
| Colour Variation Initial (SDCM) | 6                                          |
| Beam Angle (°)                  | 52 x 117                                   |
| Glare control                   | < 18                                       |
| Photobiological Risk Group      | RG1                                        |
| Total power consumption (W)     | 202                                        |

## SYLVEO LED 20000LM ROAD ASYMMETRIC 4K DALI 0049147

|                           |                        |
|---------------------------|------------------------|
| Electrical protection     | Class I                |
| Control gear type         | Electronic ballast     |
| Dimmable                  | Yes                    |
| Minimum dimming level (%) | 1                      |
| LED Flickering Rate       | Ultra low (5% or less) |
| Housing colour            | RAL 9006 - Aluminium   |
| IP rating                 | IP66                   |
| IK rating                 | IK08                   |
| Product EAN number        | 5410288491479          |
| Warranty                  | 5 years                |
| Dimming method            | DALI                   |

### Photometry

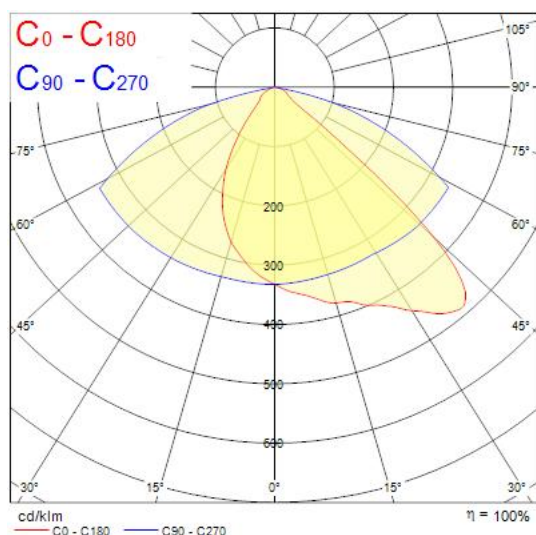

### Technical drawings

