

START Surface IP66 860-2800LM 830 IK10 WHT
0049292



Features

- LED exterior surface mounted luminaire, 350mm diameter, 2800lm as max. lumen output, can be adjusted down to 860lm by internal switch, max 24W power consumption, max 128lm/W efficacy, 3000K color temperature, CRI80, non-dimmable, IP66, IK10, 100,000 hours (L70B50) Lifespan, white housing, vandal resistant, supplied with anti-theft screws


Product Overview

Product name	START Surface IP66 860-2800LM 830 IK10 WHT
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4579593
Fixture luminous flux (lm)	2800
Luminaire efficacy (lm/W)	118
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	RG0
Total power consumption (W)	24
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Housing colour	RAL 9003 - Signal white
IP rating	IP66

START Surface IP66 860-2800LM 830 IK10 WHT
0049292

IK rating	IK10
Product EAN number	5410288492926
Warranty	5 years
Dimming method	N/A

Photometry

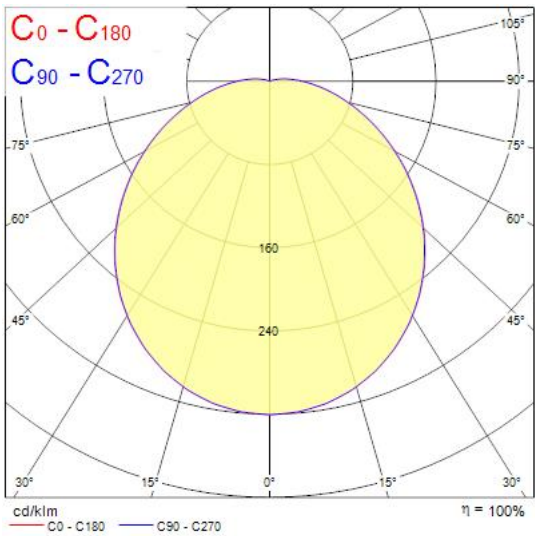

Technical drawings

