

Raiden IP66 3KLM 840 Asymmetric Wide 2824058



Features

- Outdoor and indoor floodlight range with in house design, comes complete with 1m flying lead and adjustable bracket, aluminium housing, RAL 9022 - Pearl light grey, clear glass diffuser, IP66, IK08, Class I, 4000K, Non-dimming, 3150lm, 26W, 121lm/W, CRI80, Asymmetric Wide beam angle 110°50°, 100000 hrs L90B50 lifespan, 254x203x68mm (LxWxH) dimensions, 2.1kg weight. Ball-impact-resistance according to DIN57710-13 VDE 0710 13/5.81, DIN 18032-3 only with the separate wire guard accessory fitted.

Product Overview


Product name	Raiden IP66 3KLM 840 Asymmetric Wide
Technology	LED
Cap/Base	N/A
Housing	Aluminium
General application	Logistics & Industry
ETIM Class	EC001744
Fixture luminous flux (lm)	3150
Luminaire efficacy (lm/W)	121
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	110°50'
Photobiological Risk Group	RG1
Total power consumption (W)	26
Electrical protection	Class I
Dimmable	No
Housing colour	RAL 9022 - Pearl light grey
IP rating	IP66
IK rating	IK08

Concord

Raiden IP66 3KLM 840 Asymmetric Wide 2824058

Product EAN number	5025768240586
Warranty	5 years
Dimming method	N/A

Photometry

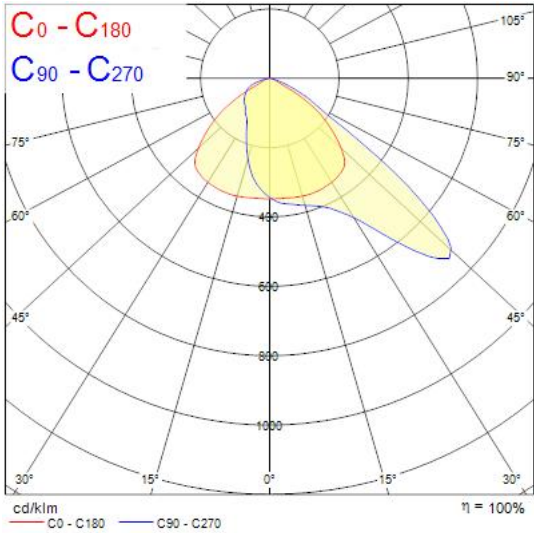

Technical drawings

