

PRODUCT DATASHEET

SL AREA SPD XL V 150W 727 RV35ST GY

STREETLIGHT AREA EXTRA LARGE RV35ST | Fitting a broad range of street and area lighting applications



Areas of application

- Outdoor use (IP66)
- M-, C- and P-class roads acc. to EN 13201
- Car parks
- Area lighting

Product benefits

- Functional and minimalistic design
- Low maintenance and operation costs due to long lifetime of LED
- 5 years guarantee

Product features

- Light distributions optimized for streets of similar width to the pole height
- Spigot included, suitable for 48...60 mm diameter poles
- Adjustable spigot for both side-entry and post-top installation
- +/- 30° tilt angle adjustment without opening the housing
- High luminous efficacy: up to 135 lm/W
- Operating temperature: -30...50 °C
- High surge protection: up to 10 kV (L/N-PE)




TECHNICAL DATA**Electrical data**


Nominal wattage	150.00 W
Nominal voltage	100...240 V
Mains frequency	50...60 Hz
Nominal current	640.000 mA
Inrush current	8.9 A
Inrush current time T_{H50}	400 μ s
Max. no. of lum. on circuit break. B16 A	17
Max. no. of lum. on circuit break. C10 A	11
Max. no. of lum. on circuit break. C16 A	18
Power factor λ	> 0.90
Total harmonic distortion	< 20 %
Protection class	I
Operating mode	Integrated LED driver

Photometrical data

Luminous flux	19500 lm
Luminous efficacy	130 lm/W
Color temperature	2700 K
Light color (designation)	Warm White
Color rendering index Ra	70
Standard deviation of color matching	< 5 sdc _m
Low flicker	Yes
Photobiological safety group acc. to EN62778	RG1
Photobiological safety group acc. to EN62471	RG1
Beam angle	155° x 69°

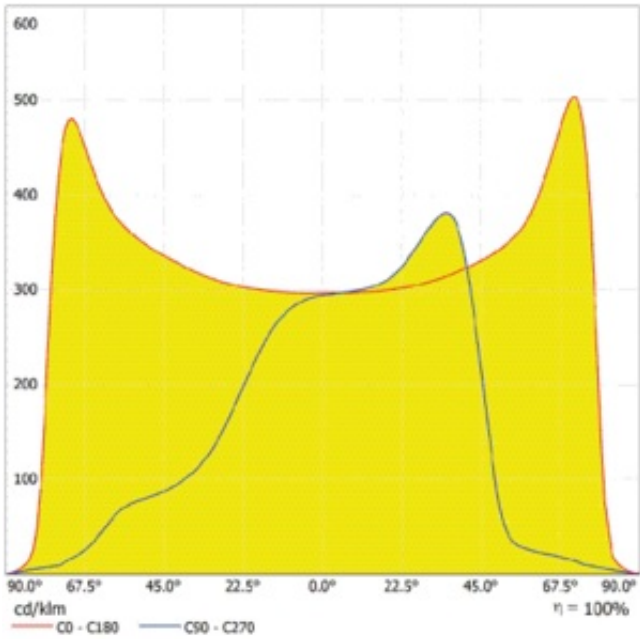


LDC typ cone

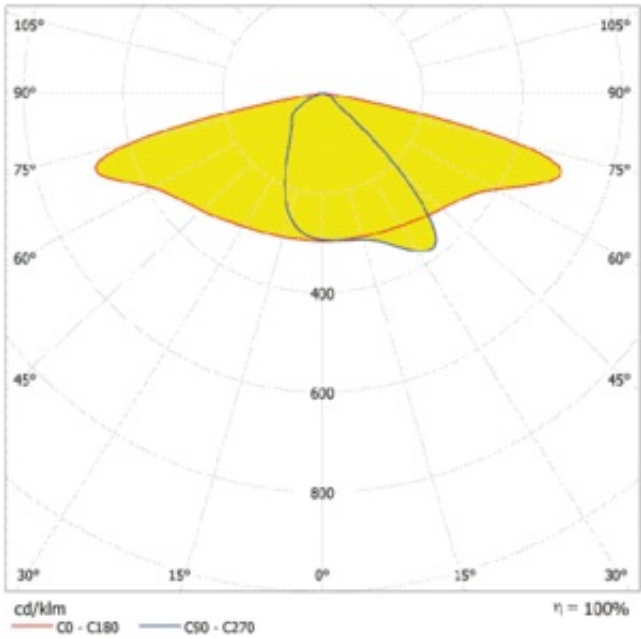

LDC typ polar

Dimensions & Weight

Length	553.00 mm
Width	270.00 mm
Height	73.00 mm
Product weight	4150.00 g
Cable length	500 mm



Materials & Colors

Product color	Gray
Housing color	Gray
Body material	Aluminum
Cover material	Polycarbonate (PC)
Light emitting surface material	Polycarbonate (PC)
Glow Wire Test according to IEC 60695-2-12	650 °C

Application & Mounting

Ambient temperature range	-30...+50 °C
Temperature range at storage	-30...+80 °C
Type of connection	Cable, 3-pole
Type of protection	IP66
Protection class IK (shock resistance)	IK08
Dimmable	No
Mounting type	Side entry/post top
Mounting location	Pole
Application environment	Outdoor
Adjustable	Yes
LED module replaceable	Not replaceable
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	70000 h
Lifespan L80/B10 at 25 °C	70000 h
Lifespan L90/B10 at 25 °C	30000 h
Number of switching cycles	100000

Control gear

Output current	840 mA
ECG - Output ripple current	< 5 %

Certificates & Standards

Standards	CE / REACH / RoHS / ENEC
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No

DOWNLOAD DATA

Documents and certificates	
	User instruction
	Packaging insert
	Declarations Of Conformity CE
	Declarations Of Conformity UKCA
Photometric and lighting design files	
	IES file (IES)
	LDT file (Eulumdat)
	LDC typ cone
	LDC typ polar

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854079962	Folding box 1	79 mm x 722 mm x 297 mm	4315.00 g	16.94 dm ³
4099854079979	Shipping box 2	741 mm x 316 mm x 185 mm	9313.00 g	43.32 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.