


## PRODUCT DATASHEET

# Vintage 1906 GLOBE 125 DIM Filament-Spiral 37 4.8 W/2200 K GOLD E27

Vintage 1906 LED DIM | LED lamps, dimmable vintage edition

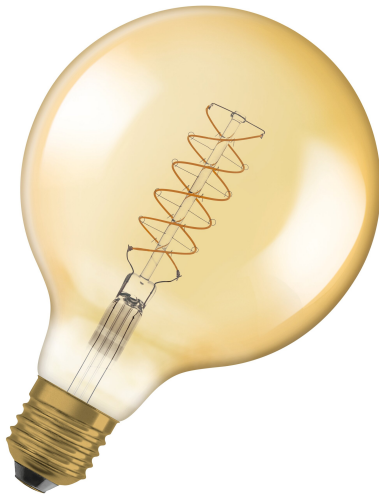

### Areas of application

- Perfect for decorative installations
- Domestic applications
- General illumination
- Outdoor use in suitable outdoor luminaires only

### Product benefits

- Very low energy consumption
- Instant 100 % light, no warm-up time
- Can be easily fitted instead of ordinary light bulbs
- Lamps with innovative LED "filament" technology

### Product features

- LED lamps for line voltage
- Lamp made of glass
- Lifetime: up to 15,000 h
- Beam angle: up to 360°
- Dimmable
- Good quality of light; color rendering index  $R_a \geq 80$ ; constant chromaticity




## TECHNICAL DATA

### Electrical data

Nominal wattage	4.8 W
Construction wattage	4.80 W
Nominal voltage	220...240 V
Claimed equiv. conventional lamp power	37 W
Nominal current	30 mA
Type of current	AC
Inrush current	0.08 A
Operating frequency	50/60 Hz
Mains frequency	50/60 Hz
Max. lamp no. on circuit break. 10 A (B)	266
Max. lamp no. on circuit break. 16 A (B)	426
Power factor $\lambda$	> 0.50

### Photometrical data

Luminous flux	420 lm
Nominal useful luminous flux 90°	420 lm
Luminous efficacy	87 lm/W
Lumen main.fact.at end of nom.life time	0.93
Light color (designation)	Comfort warm white
Color temperature	2200 K
Color rendering index Ra	80
Light color	822
Standard deviation of color matching	$\leq 6$ sdc <sub>m</sub>
Rated LLMF at 6,000 h	0.80
Flickering metric (Pst LM)	$\leq 1$
Stroboscope effect metric (SVM)	$\leq 0.4$



### Light technical data

Beam angle	320 °
Warm-up time (60 %)	< 0.50 s
Starting time	< 0.5 s
Rated beam angle (half peak value)	320.00 °

### Dimensions & Weight



Overall length	173.00 mm
Diameter	124.00 mm
Maximum diameter	124 mm
Product weight	100.00 g

### Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
Maximum temperature at tc test point	55,4 °C

### Lifespan

Lifespan	15000 h
Number of switching cycles	100000
Lumen maintenance at end of serv	0.93
Rated lamp survival factor at 6,000 h	≥ 0.90

### Additional product data

Base (standard designation)	E27
Mercury content	0.0 mg
Mercury-free	Yes
Design / version	Clear gold
Product remark	All technical parameters apply to the entire lamp / Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

### Capabilities

Dimmable	Yes
----------	-----

### Certificates & Standards

Energy efficiency class	F <sup>1)</sup>
Energy consumption	5.00 kWh/1000h
Type of protection	IP20
Standards	CE / ROHS / REACH
Photobiological safety group acc. to EN62778	RG0

<sup>1)</sup> Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)

### Country-specific categorizations

Order reference	1906LGL125D4,8W
-----------------	-----------------

### LOGISTICAL DATA

Temperature range at storage	-20...+80 °C
------------------------------	--------------

### Energy labelling regulation data acc EU 2019/2015

Lighting technology used	LED
Non-directional or directional	NDLS
Mains or non-mains	MLS
Light source cap-type (or other electric interface)	E27
Connected light source (CLS)	No
Color-tuneable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No
Correlated colour temperature type	SINGLE_VALUE
Standby power	0 W
Claim of equivalent power	Yes
Length	173.00 mm
Height	124.00 mm
Width	124.00 mm
Chromaticity coordinate x	0.502
Chromaticity coordinate y	0,415
R9 Colour rendering index	0.00
Beam angle correspondence	SPHERE_360
Survival factor	0.90

Displacement factor	≥0.5
LED light source replaces a fluorescent light source	No
EPREL ID	1212454
Model number	AC41929

## DOWNLOAD DATA

### Documents and certificates



Declarations Of Conformity CE

### Photometric and lighting design files



Spectral power distribution

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075761650	Folding box 1	140 mm x 140 mm x 236 mm	194.00 g	4.63 dm <sup>3</sup>
4058075761667	Shipping box 4	298 mm x 292 mm x 251 mm	1080.00 g	21.84 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.