


Reptistar T8
F15W REPTISTAR UV-B 10%
0000741



Product features

- Provides the necessary UVB radiation for reptile habitats. Daylight colour temperature 6500K. This lamp emits UV-radiation, Avoid exposure.

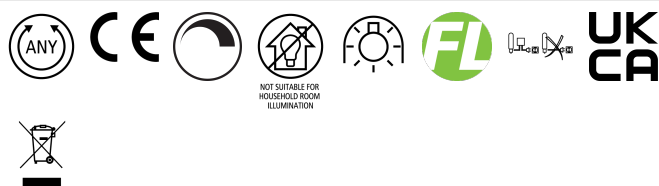

PRODUCT OVERVIEW

Product name	F15W REPTISTAR UV-B 10%
Technology	Fluorescent
Lamp shape	Tubular shape
Type	T8
Cap/Base	G13
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	SPG
ETIM Class	EC002962
Luminous flux (lm)	300
Colour temperature (K)	6500
Light colour	UV
Wattage (W)	15.00
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Average life (Nominal) (h)	14000
Product EAN number	5410288007410

DATA TABLE

General data	
Product name	F15W REPTISTAR UV-B 10%
Technology	Fluorescent
Lamp shape	Tubular shape
Type	T8
Cap/Base	G13
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	SPG
Operating temperature range (°C)	-15°C...+40°C
ETIM Class	EC002962

Reptistar T8

F15W REPTISTAR UV-B 10%

0000741

Optical data

Luminous flux (lm)	300
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	6500
Light colour	UV
Adjustable chromaticity	N

Electrical data

Wattage (W)	15.00
Current (A)	0.310
Primary Supply/Product voltage - min (V)	46.0
Primary Supply/Product voltage - max (V)	64.0
Control gear required	Yes
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Drive current (mA)	310

Lifetime data

Average life (Nominal) (h)	14000
----------------------------	-------

Physical data

Nominal Product Length (mm)	450.0
Nominal Product Diameter (mm)	26
Max. Length base to base (mm) - A	437.4
Length base to pin Min-Max (mm) - B	442.1-444.5
Max. Lamp Length (mm) - C/L	451.6
Max. Lamp Diameter (mm) - D	28.0
Weight (kg)	0.062

Packaging

Single packaging type	Carton
Product EAN number	5410288007410
Packaging single length / height (cm)	67.1
Packaging single width (cm)	2.7
Packaging single depth (cm)	2.7
DUN14 (outer)	15410288007417
Units per outer package	10
Packaging outer length / height (cm)	70.1
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	14.7

Safety data

Lamp mercury content (mg)	2.80
Optimal operating condition (°C)	-15-40
Breakage cleaning instructions	Applicable
Special purpose lamp	Yes



Reptistar T8
F15W REPTISTAR UV-B 10%
0000741

Intended purpose	High UV Content (>2mW/klm)(Terrarium High UV lamps)
Suitable for household illumination	No
Safety message	Not suitable for household