

RefLED ES50
RefLED ES50 V6 345LM 840 36 SL5
0029168



- Product features
- Compact, energy efficient and exceptional value LED GU10 lampSame shape and size as halogen GU10 lampCompact Cluster SMD technology enabling high efficiency with halogen lookReduced visible heat sink from the frontAvailable in 36 degree beam angleHigh lumen efficacy15,000 hours average rated life3 years warranty

PRODUCT OVERVIEW

Product name	RefLED ES50 V6 345LM 840 36 SL5
Technology	LED
Watt (Rated) (W)	4.2
Type	LED exchangeable
Cap/Base	GU10
Fixture rating	Open
General application	Education, Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC001959
Warranty	3 years
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Beam Angle (°)	36
Photobiological Risk Group	RG1
Wattage (W)	4.2
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288291680

DATA TABLE

General data	
Product name	RefLED ES50 V6 345LM 840 36 SL5
Technology	LED
Watt (Rated) (W)	4.2
Type	LED exchangeable
Cap/Base	GU10
Fixture rating	Open
General application	Education, Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959

RefLED ES50

RefLED ES50 V6 345LM 840 36 SL5

0029168

Warranty	3 years
----------	---------

Optical data

Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Luminous Intensity (cd)	770
Beam Angle (°)	36
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

Electrical data

Wattage (W)	4.2
Equivalent watt (W)	50
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>50000
Dimmable	No
Inrush Current (A)	3.9
Inrush Duration (µs)	4100
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	123
Max. products per 16A B Breaker	74

Lifetime data

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

Physical data

Nominal Product Height (mm)	54
Nominal Product Diameter (mm)	50
Weight (kg)	0.18

Packaging

Single packaging type	Carton
Product EAN number	5410288291680
Packaging single length / height (cm)	8.2
Packaging single width (cm)	19.5
Packaging single depth (cm)	5.1
DUN14 (outer)	15410288291687
Units per outer package	6
Packaging outer length / height (cm)	9.2


RefLED ES50
RefLED ES50 V6 345LM 840 36 SL5
0029168

Packaging outer width (cm)	20.2
Packaging outer depth (cm)	32.3

Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

PHOTOMETRY

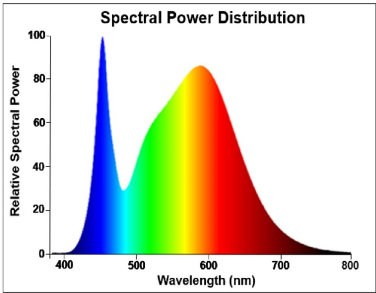

TECHNICAL DRAWINGS

RefLED ES50
RefLED ES50 V6 345LM 840 36 SL5
0029168

**ENERG**

SYLVANIA

0029168



5

kWh/1000h




2019/2015

RefLED ES50
RefLED ES50 V6 345LM 840 36 SL5
0029168



0029168

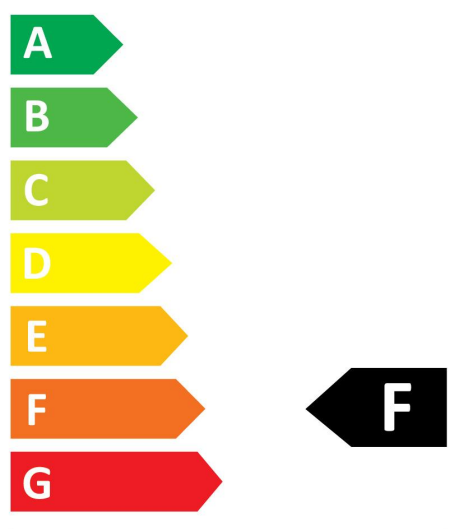

5
kWh/1000h

