


RANA Linear Recessed - Opal Diffuser
RANA LINEAR R 3KLM NW OPAL EM
0052372



Product features

- Ceiling recessed LED Linear luminaire with Opal diffuser, Dimensions: 1154mm x 90mm x 91mm, Direct, White Body, Emergency 3 hours maintained, Neutral White LED (4000K), 3210lm, 35W, 92lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse), Low LED Flicker (+/-5%), UGR<23, L90B10 at 50,000 hours, Electric Class1, Glow Wire Test 850°C, Can be covered with building insulation of Glass wool type

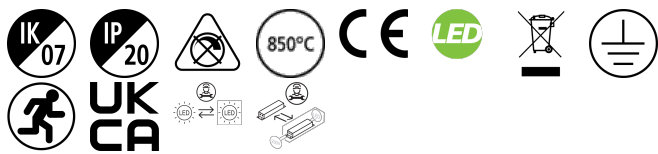

PRODUCT OVERVIEW

Product name	RANA LINEAR R 3KLM NW OPAL EM
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Environment	Internal
General application	Office, Hospitality, Retail, Education
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	3210
Luminaire efficacy (lm/W)	91.71
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Glare control	< 23
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	452
Total power consumption (W)	35
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288523729

RANA Linear Recessed - Opal Diffuser

RANA LINEAR R 3KLM NW OPAL EM
0052372

DATA TABLE

General data

Product name	RANA LINEAR R 3KLM NW OPAL EM
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Environment	Internal
General application	Office, Hospitality, Retail, Education
Operating temperature range (°C)	5°C...+30°C
Performance ambient temperature T _q (°C)	25
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3210
Luminaire efficacy (lm/W)	91.71
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Distribution type	Symmetric
Glare control	< 23
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	452
Emergency duration (h)	3.0

Electrical data

Total power consumption (W)	35
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Drive current (mA)	300
Inrush Current (A)	22
Inrush Duration (µs)	250
Glow Wire Test (°C)	850

RANA Linear Recessed - Opal Diffuser

RANA LINEAR R 3KLM NW OPAL EM

0052372

Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	40
Max. products per 13A C Breaker	51
Max. products per 16A C Breaker	63
Max. products per 20A C Breaker	80
Max. products per 10A B Breaker	15
Max. products per 13A B Breaker	31
Max. products per 16A B Breaker	25
Max. products per 20A B Breaker	48
Connectable conductor cross section - Min (mm²)	2.5
Connectable conductor cross section - Max (mm²)	2.5

Lifetime data

Lifespan L70 B50	60000
Lifespan L70 B20	60000
Lifespan L70 B10	60000
Lifespan L80 B50	60000
Lifespan L80 B20	60000
Lifespan L80 B10	60000
Lifespan L90 B50	60000
Lifespan L90 B20	60000
Lifespan L90 B10	60000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1150
Nominal Product Width (mm)	90
Nominal Product Height (mm)	91
Cutout Dimensions (W x L in mm or Diameter in mm)	72
Weight (kg)	3.65
Recessed Depth (mm)	90

Packaging


Single packaging type	Carton
Product EAN number	5410288523729
Packaging single length / height (cm)	117.0
Packaging single width (cm)	10.5
Packaging single depth (cm)	11.5
DUN14 (outer)	5410288523729
Units per outer package	1

RANA Linear Recessed - Opal Diffuser
RANA LINEAR R 3KLM NW OPAL EM
0052372

Packaging outer length / height (cm)	117.0
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	11.5

Safety data	
Optimal operating condition (°C)	5-30

PHOTOMETRY

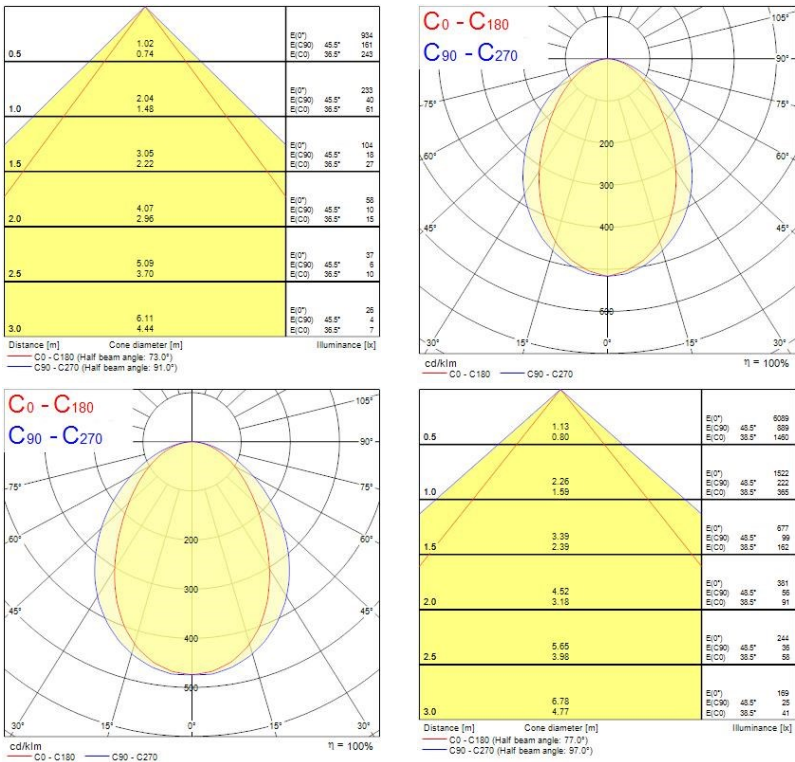

TECHNICAL DRAWINGS

