




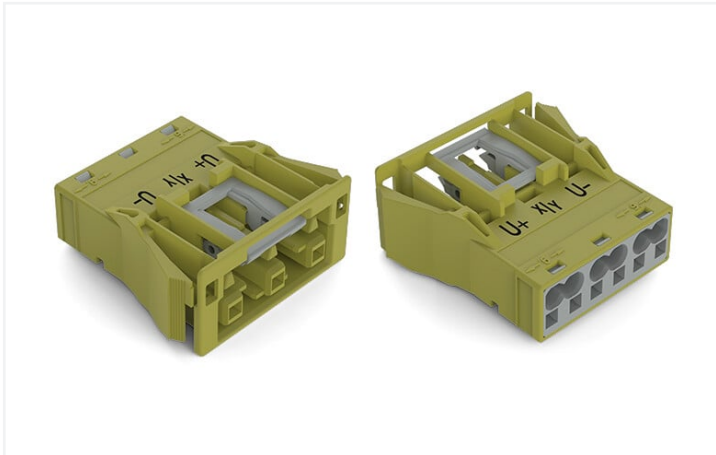

Color: ■ light green

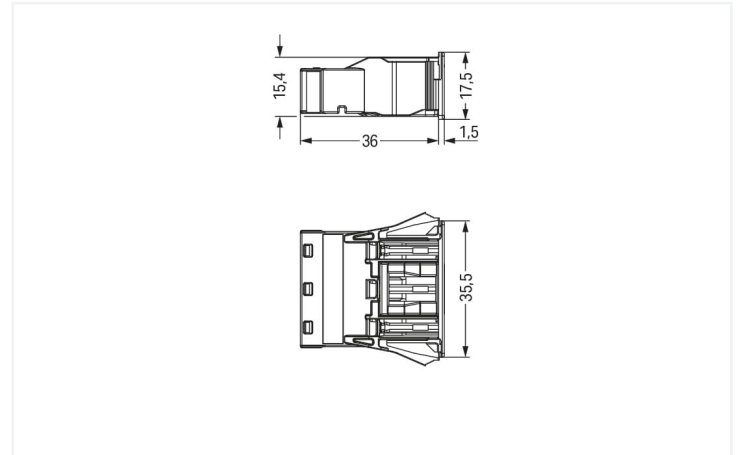

Dimensions in mm

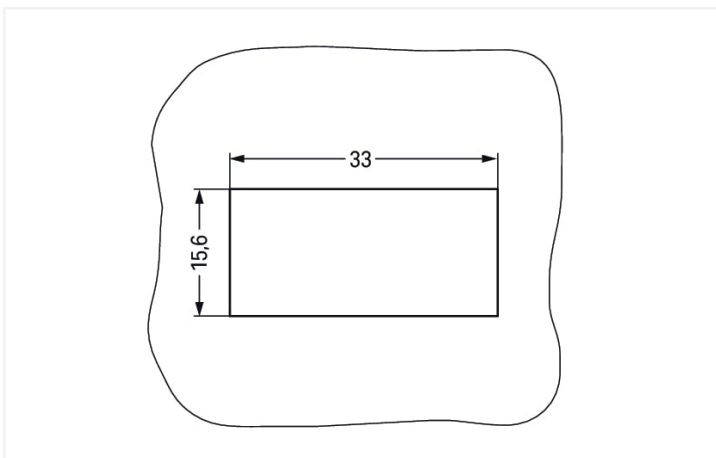

Dimensions in mm

Plate thickness: 0.5 ... 2 mm

Cutout tolerance: + 0.1 mm

Please note!

Female connector/socket WINSTA® MIDI with protection type IP20

The WINSTA® MIDI female connector/socket with locking latch is the pluggable solution for your application in control cabinets, for lighting connections or on PCBs. The pluggable installation connectors with spring pressure connection technology work completely without screw connections. They allow flexible, error-free installation in a large number of possible uses. The mechanical coding and color coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismatching. The pluggable installation connector offers protection against contact with live components in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). Solutions like the WINSTA® MIDI pluggable installation connectors with B coding are suitable for process control, such as for lighting or within data networks. This pluggable installation connector can be employed for a current load of up to 25 A. Therefore, it can also be used for high power loads. The WINSTA® MIDI product line offers flexibility for the electrical installation. With its Push-in CAGE CLAMP® spring pressure connection technology, it guarantees time-saving, error-free installation and offers flexibility for meeting all installation requirements.

Lower costs through fast commissioning and elimination of service expenses – solutions from WINSTA® MIDI

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology tool! Plan your installation with WINSTA® MIDI pluggable installation connectors with marking from WAGO.

- pluggable installation connectors with protection against mismatching
- simple circuits
- for automation controllers
- custom-engineered solutions
- convenient installation and commissioning



Notes	
Note	The snap-in connectors must be relieved of tensile and transverse forces. A surface finish can influence the edge radius of the cutouts. This may affect the snap-in socket fit, so ensure an adequate fit before use. In addition, the punched edge should be on the inside for punched cutouts. The wings of the snap-in connectors must not be mechanically stressed for a long period before use (e.g., due to a pre-locking position).
Variants:	Other pole markings Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .

Electrical data				
Ratings per		IEC/EN 60664-1		
Overvoltage category		III	III	II
Pollution degree		3	2	2
Nominal voltage		250 V	-	-
Rated surge voltage		4 kV	-	-
Rated current		25 A	-	-
Approvals per		UL 1977		
Rated voltage		600 V		
Rated current		23 A		
General information				
Note on contact resistance		approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/ socket		

Connection data																												
Connection points	6	Connection 1 <table><tr><td>Connection technology</td><td>Push-in CAGE CLAMP®</td></tr><tr><td>Actuation type</td><td>Operating tool Push-in</td></tr><tr><td>Nominal cross-section</td><td>4 mm² / 12 AWG</td></tr><tr><td>Solid conductor</td><td>0.5 ... 4 mm² / 20 ... 12 AWG</td></tr><tr><td>Solid conductor; push-in termination</td><td>1.5 ... 4 mm² / 16 ... 12 AWG</td></tr><tr><td>Stranded conductor</td><td>0.5 ... 2.5 mm² / 20 ... 14 AWG</td></tr><tr><td>Fine-stranded conductor</td><td>0.5 ... 4 mm² / 20 ... 12 AWG</td></tr><tr><td>Fine-stranded conductor; with insulated ferrule</td><td>0.25 ... 1.5 mm² / 20 ... 16 AWG</td></tr><tr><td>Fine-stranded conductor; with uninsulated ferrule</td><td>0.25 ... 2.5 mm² / 20 ... 14 AWG</td></tr><tr><td>Fine-stranded conductor; with ferrule; push-in termination</td><td>1.5 mm² / 16 AWG</td></tr><tr><td>Strip length</td><td>9 mm / 0.35 inches</td></tr><tr><td>Pole number</td><td>3</td></tr><tr><td>Conductor entry direction to mating direction</td><td>0 °</td></tr></table>	Connection technology	Push-in CAGE CLAMP®	Actuation type	Operating tool Push-in	Nominal cross-section	4 mm² / 12 AWG	Solid conductor	0.5 ... 4 mm² / 20 ... 12 AWG	Solid conductor; push-in termination	1.5 ... 4 mm² / 16 ... 12 AWG	Stranded conductor	0.5 ... 2.5 mm² / 20 ... 14 AWG	Fine-stranded conductor	0.5 ... 4 mm² / 20 ... 12 AWG	Fine-stranded conductor; with insulated ferrule	0.25 ... 1.5 mm² / 20 ... 16 AWG	Fine-stranded conductor; with uninsulated ferrule	0.25 ... 2.5 mm² / 20 ... 14 AWG	Fine-stranded conductor; with ferrule; push-in termination	1.5 mm² / 16 AWG	Strip length	9 mm / 0.35 inches	Pole number	3	Conductor entry direction to mating direction	0 °
Connection technology	Push-in CAGE CLAMP®																											
Actuation type	Operating tool Push-in																											
Nominal cross-section	4 mm² / 12 AWG																											
Solid conductor	0.5 ... 4 mm² / 20 ... 12 AWG																											
Solid conductor; push-in termination	1.5 ... 4 mm² / 16 ... 12 AWG																											
Stranded conductor	0.5 ... 2.5 mm² / 20 ... 14 AWG																											
Fine-stranded conductor	0.5 ... 4 mm² / 20 ... 12 AWG																											
Fine-stranded conductor; with insulated ferrule	0.25 ... 1.5 mm² / 20 ... 16 AWG																											
Fine-stranded conductor; with uninsulated ferrule	0.25 ... 2.5 mm² / 20 ... 14 AWG																											
Fine-stranded conductor; with ferrule; push-in termination	1.5 mm² / 16 AWG																											
Strip length	9 mm / 0.35 inches																											
Pole number	3																											
Conductor entry direction to mating direction	0 °																											
Total number of potentials	3																											

Physical data	
Pin spacing	10 mm / 0.394 inches
Width	35.5 mm / 1.398 inches
Height	17.5 mm / 0.689 inches
Depth	37.5 mm / 1.476 inches

Mechanical data

Application	Control technology
Coding	B
Variable coding	Yes
Marking	U+ X/Y U-
Potential marking	U+ X/Y U-
Mating force of a plug-in connection	approx. 20 ... 70 N (depending on pole number)
Retention force of a plug-in connection	Locked: > 80 N
Unmating force of a plug-in connection	Unlocked: approx. 20 ... 70 N (depending on pole number)
Number of mating cycles	200, without resistive load
Housing sheet thickness	0.5 ... 2 mm / 0.02 ... 0.079 inches
Mounting type	Snap-in flange
Protection type	IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)

Plug-in connection

Contact type (pluggable connector)	Female connector/socket
Connector (connection type)	for conductor
Mismating protection	Yes
Note on mismating protection	All <i>WINSTA</i> ® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever	Yes
Locking of plug-in connection	Locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).

Material data

Note (material data)	Information on material specifications can be found here
Color	light green
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper or copper alloy; surface-treated
Contact plating	Tin
Fire load	0.252 MJ
Weight	12 g

Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C




Commercial data		
eCl@ss 10.0		27-44-06-02
eCl@ss 9.0		27-44-06-02
ETIM 8.0		EC002566
ETIM 7.0		EC002566
PU (SPU)		100 pcs
Packaging type		Box
Country of origin		DE
GTIN		4050821553335
Customs tariff number		85366990990

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1977	E45171
cURus Underwriters Laboratories Inc.	UL 1059	E 45172

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 770-763/071-000	

Documentation

Bid Text			
770-763/071-000	19.02.2019	xml 2.92 KB	
770-763/071-000	08.06.2015	doc 24.00 KB	

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 770-763/071-000	EPLAN Data Portal 770-763/071-000
	WSCAD Universe 770-763/071-000
	ZUKEN Portal 770-763/071-000

1 Compatible Products

1.1 System counterpart

1.1.1 Male connector/plug



Item No.: 770-273/071-000
Plug; 3-pole; Cod. B; 4,00 mm²; light green

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



Item No.: 770-201
Lockout cap; 12-pole, separable; for sockets; Plastic; black



Item No.: 770-221
Lockout cap; 12-pole, separable; for sockets; Plastic; white



Item No.: 770-643
Lockout cap; 3-pole; for cutouts; Plastic; black



Item No.: 770-693
Lockout cap; 3-pole; for cutouts; Plastic; white

1.2.2 Tool

1.2.2.1 Operating tool




Item No.: 770-383
Operating tool; 3-way; green




Item No.: 210-719
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft


Installation Notes




We recommend pulling the pre-latched strain relief housing over the cable prior to termination. However, the strain relief can be mounted at a later time as well.



1. Strip length, outer insulation = 35 mm (2-pole), 55 mm (3- to 5-pole)
2. Strip length = 9 mm
3. Extended ground conductor = 8 mm




To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a striped conductor until it hits the backstop.



Insert the stripped solid conductor until it hits the backstop.



To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.



To remove the conductor, actuate the clamp via screwdriver (2.5 mm blade width) and pull out the conductor.