





Color: ■ light gray

Similar to illustration

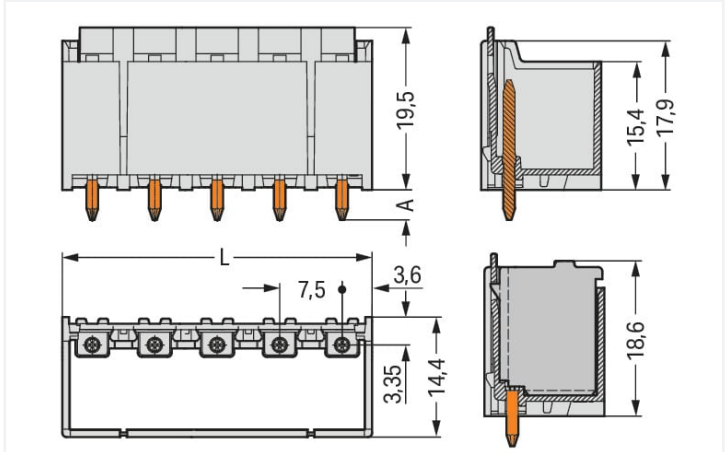

Dimensions in mm
L = (pole no. – 1) x pin spacing + 7.2 mm
A = 3.6 mm THT solder pin
A = 2.4 mm THR solder pin

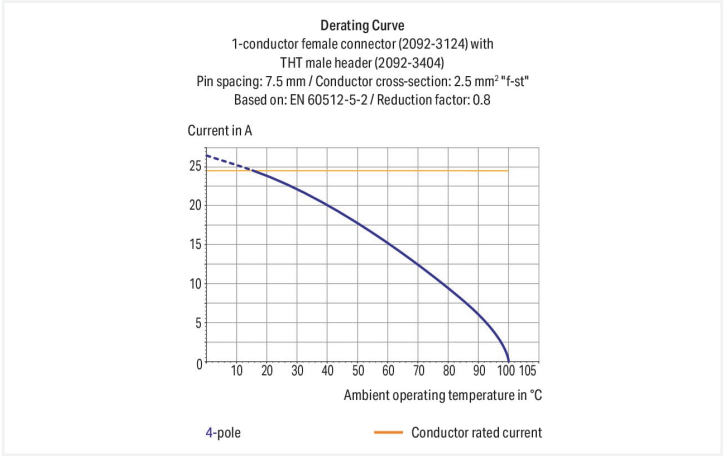

- Assembly of female connectors without loss of poles, allowing different functions to be divided within one male header (≥ 4 poles)
- Coding pins inserted into the header interface prevent mismatching, allowing subsequent coding in panel feedthrough applications
- The female connector is fully shrouded by the male header's housing, providing vibration resistance up to 20 g

Notes			
Safety information		The picoMAX® Pluggable Connection System includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.	
Variants:		Direct marking Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .	

Electrical data			
Ratings per		IEC/EN 60664-1	
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	400 V	630 V	1000 V
Rated surge voltage	6 kV	6 kV	6 kV
Rated current	16 A	16 A	16 A
Approvals per		UL 1059	
Use group	B	C	D
Rated voltage	300 V	-	300 V
Rated current	15 A	-	10 A



Connection data		
Total number of potentials	3	Connection 1
Number of connection types	1	
Number of levels	1	
		Pole number 3

Physical data		
Pin spacing	7.5 mm / 0.295 inches	
Width	22.2 mm / 0.874 inches	
Height	21.9 mm / 0.862 inches	
Height from the surface	19.5 mm / 0.768 inches	
Depth	14.4 mm / 0.567 inches	
Solder pin length	2.4 mm	
Solder pin diameter	1.4 mm	
Plated through-hole diameter (THR)	1.6 ^(+0.1) mm	

Mechanical data		
Variable coding	Yes	
Anti-rotation protection	Yes	

Plug-in connection		
Contact type (pluggable connector)	Male connector/plug	
Connector (connection type)	for PCB	
Mismating protection	No	
Plugging without loss of pin spacing	Yes	
Mating direction to the PCB	90 °	
Locking of plug-in connection	Locking latch	

PCB contact		
PCB contact	THR	

Material data		
Note (material data)	Information on material specifications can be found here	
Color	light gray	
Material group	I	
Insulation material	Polyphthalamide (PPA GF)	
Flammability class per UL94	V0	
Contact material	Electrolytic copper (E _{Cu})	
Contact plating	Tin	
Fire load	0.053 MJ	
Weight	2.3 g	
MSL per J-STD 020D	1	



Environmental requirements	
Limit temperature range	-60 ... +100 °C
Processing temperature	-35 ... +60 °C

Commercial data	
eCl@ss 10.0	27-44-04-02
eCl@ss 9.0	27-44-04-02
ETIM 8.0	EC002637
ETIM 7.0	EC002637
PU (SPU)	100 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821396529
Customs tariff number	85366930000

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CSA DEKRA Certification B.V.	C22.2	2362521
cURus Underwriters Laboratories Inc.	UL 1059	E45172
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-102261 REV.2
UL Underwriters Laboratories Inc.	UL 1977	E45171

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 2092-3403/200-000	

Documentation

Additional Information			
Technical Section	03.04.2019	pdf 2010.85 KB	↓
		pdf 392.38 KB	↓


CAD/CAE-Data

CAD data
2D/3D Models 2092-3403/200-000
↓

CAE data
ZUKEN Portal 2092-3403/200-000
↓

Installation Notes

Coding



Coding a male header (via coding key carrier and two keys for male header, see symbol).