

Data Sheet | Item Number: 733-332


THT male header; 0.8 x 0.8 mm solder pin; straight; 100% protected against mismatching; Pin spacing 2.5 mm; 2-pole; light gray

<https://www.wago.com/733-332>




Color: ■ light gray

Similar to illustration

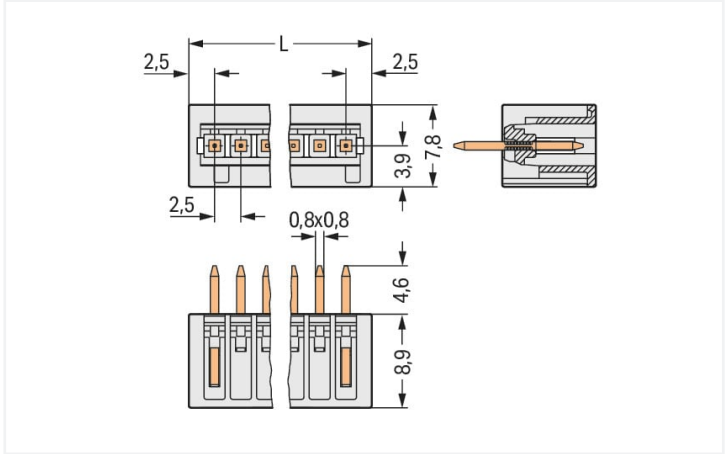

Dimensions in mm
L = (pole no. + 1) x pin spacing

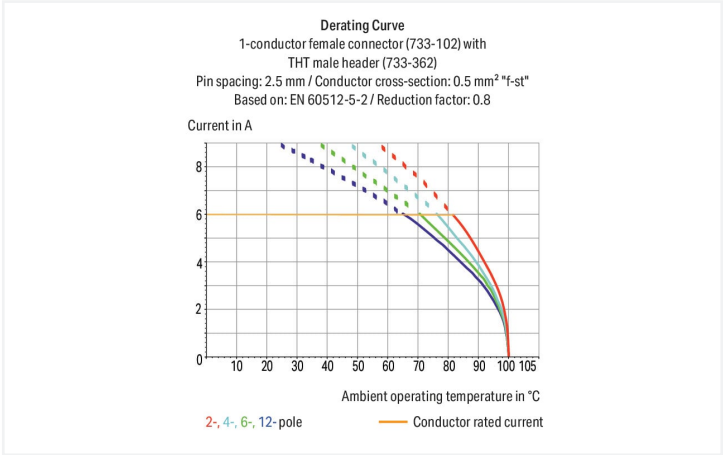

- 100% protected against mismatching; only mating halves with the same pole number can be connected
- Coding option available

Notes			
Safety information		The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.	
Variants:		Other pole numbers 3.8 mm pin projection for male headers with straight solder pins Gold-plated or partially gold-plated contact surfaces Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .	

Electrical data			
Ratings per		IEC/EN 60664-1	
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	80 V	160 V	320 V
Rated surge voltage	2.5 kV	2.5 kV	2.5 kV
Rated current	6 A	6 A	6 A
Approvals per		UL 1059	
Use group	B	C	D
Rated voltage	150 V	-	-
Rated current	4 A	-	-



Approvals per		CSA	
Use group	B	C	D
Rated voltage	150 V	-	-
Rated current	4 A	-	-

Connection data			
Total number of potentials	2	Connection 1	
Number of connection types	1	Pole number	2
Number of levels	1		

Physical data		
Pin spacing	2.5 mm / 0.098 inches	
Width	7.5 mm / 0.295 inches	
Height	13.5 mm / 0.531 inches	
Height from the surface	8.9 mm / 0.35 inches	
Depth	7.8 mm / 0.307 inches	
Solder pin length	4.6 mm	
Solder pin dimensions	0.8 x 0.8 mm	
Drilled hole diameter with tolerance	1.1 ^(+0.1) mm	

Mechanical data		
Variable coding	Yes	
Anti-rotation protection	Yes	

Plug-in connection		
Contact type (pluggable connector)	Male connector/plug	
Connector (connection type)	for PCB	
Mismating protection	Yes	
Mating direction to the PCB	90 °	

PCB contact		
PCB contact	THT	
Solder pin arrangement	over the entire male connector (in-line)	
Number of solder pins per potential	1	

Material data		
Note (material data)	Information on material specifications can be found here	
Color	light gray	
Material group	I	
Insulation material	Polyamide (PA66)	
Flammability class per UL94	V0	
Contact material	Electrolytic copper (E _{Cu})	
Contact plating	Tin	
Fire load	0.007 MJ	
Weight	0.4 g	

Environmental requirements

Limit temperature range	-60 ... +100 °C
Processing temperature	-35 ... +60 °C

Commercial data

Product Group	3 (Multi Conn. System)
eCl@ss 10.0	27-44-04-02
eCl@ss 9.0	27-44-04-02
ETIM 8.0	EC002637
ETIM 7.0	EC002637
PU (SPU)	200 pcs
Packaging type	Box
Country of origin	CN
GTIN	4050821035596
Customs tariff number	85366930000

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	2169534.01
CCA DEKRA Certification B.V.	IEC 61984	NL-31141
CSA DEKRA Certification B.V.	C22.2	1465035
UL UL International Germany GmbH	UL 1977	E45171
UR Underwriters Laboratories Inc.	UL 1059	E45172

Declarations of conformity and manufacturer's declarations



Approval	Standard	Certificate Name
Railway WAGO GmbH & Co. KG	-	Railway Ready

Approvals for marine applications



Approval	Standard	Certificate Name
ABS American Bureau of Ship-ping	-	19-HG1869876-PDA
DNV DNV GL SE	-	TAE000016Z
LR Lloyds Register	IEC 61984	96/20035 (E5)



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 733-332

Download icon

Documentation

Additional Information

Technical Section

03.04.2019

pdf

2010.85 KB

Download icon

CAD/CAE-Data

CAD data

2D/3D Models 733-332

Download icon

CAE data

EPLAN Data Portal 733-332

Download icon

ZUKEN Portal 733-332

Download icon

1 Compatible Products

1.1 System counterpart

1.1.1 Female connector/socket

[Item No.: 733-102](#)
1-conductor female connector; CAGE CLAMP®; 0.5 mm²; Pin spacing 2.5 mm; 2-pole; 100% protected against mismatching; 0,50 mm²; light gray

[Item No.: 733-102/037-000](#)
1-conductor female connector; CAGE CLAMP®; 0.5 mm²; Pin spacing 2.5 mm; 2-pole; 100% protected against mismatching; Lateral locking levers; 0,50 mm²; light gray

[Item No.: 733-102/037-000/032-000](#)
1-conductor female connector; CAGE CLAMP®; 0.5 mm²; Pin spacing 2.5 mm; 2-pole; 100% protected against mismatching; Lateral locking levers; Strain relief plate; 0,50 mm²; light gray

1.2 Optional Accessories

1.2.1 Coding


1.2.1.1 Coding

[Item No.: 733-331](#)
Coding key; snap-on type; black

[Item No.: 733-330](#)
Coding key; snap-on type; white

Installation Notes

Mismating protection



Male headers and female connectors are 100% protected against mismating. Only mating halves with the same pole number can be connected.

Coding



Coding a male header – fitting coding key (s).