







Color: white

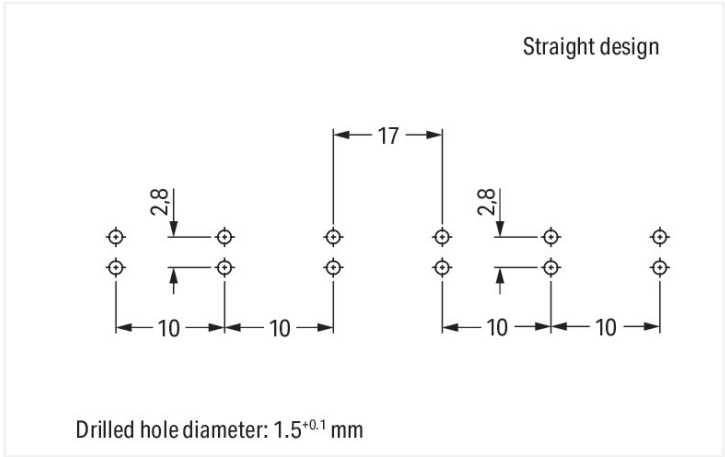

Dimensions in mm

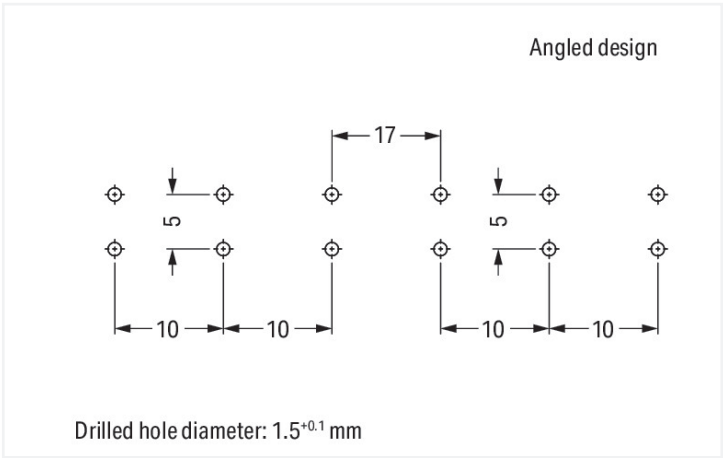

Dimensions in mm

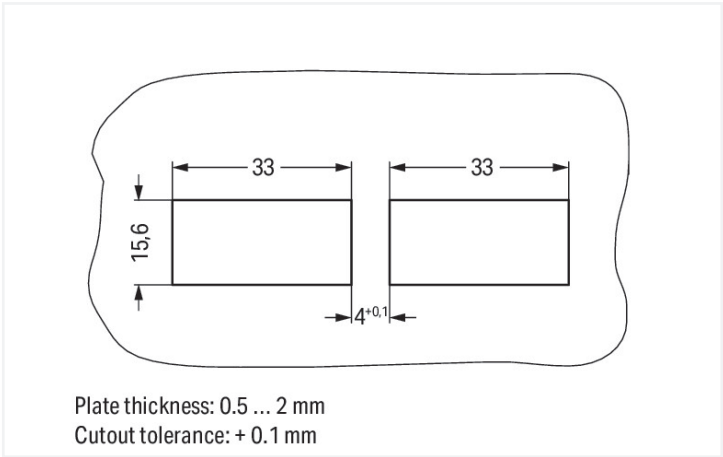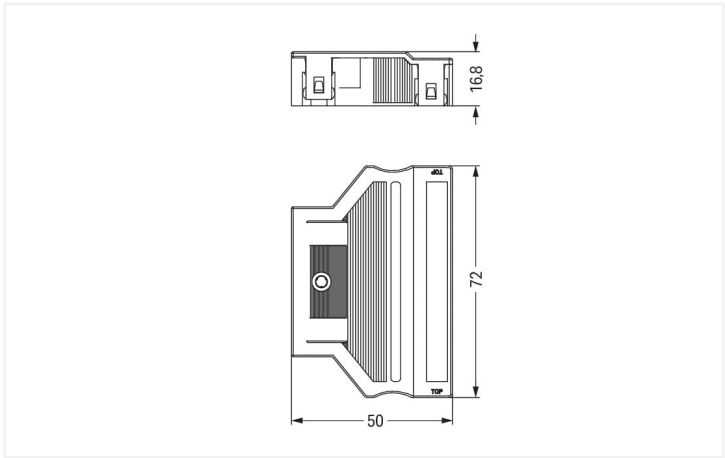

Dimensions in mm

Strain relief housing *WINSTA*® MIDI 6-pole

With the strain relief housing from the *WINSTA*® MIDI product line, error-free installation is ensured. You can rely on the quality of *WINSTA*® components from WAGO for your electrical installation accessories too. *WINSTA*® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is found in a variety of projects you can use for quick, easy, flexible, and secure electrical installation. The strip length is 55 mm.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The *WINSTA*® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection against mismatching from WAGO.

- pre-assembled versions
- rapid, structured electrical installation

Connection data

Connection 1

Pole number	6
Connectable sheathed cable diameter	8.5 ... 13.5 mm
Strip length (outer insulation)	55 mm

Physical data

Width	72 mm / 2.835 inches
Height	16.8 mm / 0.661 inches
Depth	50 mm / 1.969 inches

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.466 MJ
Weight	16.6 g

Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	20 pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454001810
Customs tariff number	85389099990



Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

Approvals for marine applications



Approval	Standard	Certificate Name
LR Lloyds Register	IEC 61984	LR22429487TA

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
770-516/029-000

↓

Documentation			
Bid Text			
770-516/029-000	19.02.2019	xml 2.84 KB	↓
770-516/029-000	06.01.2015	doc 23.50 KB	↓



CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 770-516/029-000	WSCAD Universe 770-516/029-000
↓	↓
	ZUKEN Portal 770-516/029-000
	↓

1 Compatible Products
1.1 Optional Accessories
1.1.1 Marking
1.1.1.1 Marking strip



Item No.: 210-333
Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white

Installation Notes
Application



Snap-on type strain relief housings for:

- Two 3-pole sockets
- Two 3-pole plugs
- Three-pole socket and plug

