




Color: ■ black

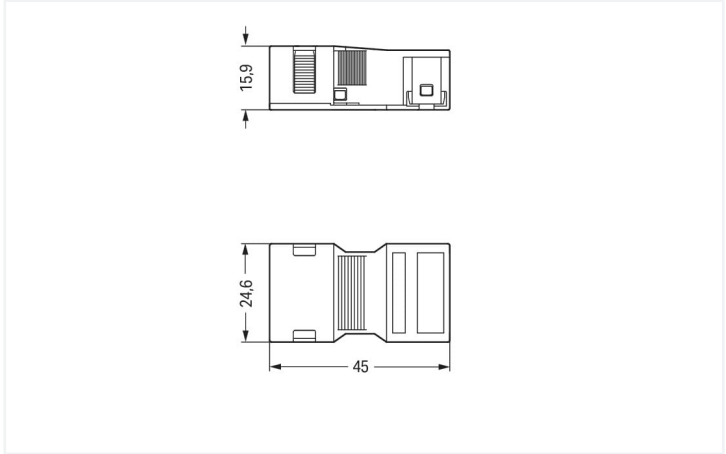

Dimensions in mm

Strain relief housing *WINSTA®* MIDI 2-pole

The strain relief housing from the *WINSTA®* MIDI product line is the best solution for straightforward electrical installation. You can rely on the quality of *WINSTA®* components from WAGO for your electrical installation accessories too. The *WINSTA®* MIDI Pluggable Connection System with Push-in *CAGE CLAMP®* spring pressure connection technology facilitates precise electrification. Thanks to the included test slot, connections can be checked even when they are plugged in. This saves time, labor, and money. A range up to 35 mm can be used for the strip length.

Lower costs through fast commissioning and elimination of service expenses – solutions from *WINSTA®* MIDI

WINSTA® is the pluggable connection system that is perfectly tailored to the strict requirements of electrical installation. It ensures error-free installation of cables and components, quickly and reliably. Now you can also cut installation expenses without compromising safety and quality: The *WINSTA®* MIDI accessory reduces the need for servicing and prevents unnecessary downtime.

- for automation controllers
- convenient installation and commissioning

Connection data

Connection 1	
Pole number	2
Connectable sheathed cable diameter	5 ... 9 mm
Strip length (outer insulation)	35 mm

Physical data

Width	24.6 mm / 0.969 inches
Height	15.9 mm / 0.626 inches
Depth	45 mm / 1.772 inches



Material data	
Note (material data)	Information on material specifications can be found here
Color	black
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.267 MJ
Weight	6.6 g

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821137566
Customs tariff number	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

Approvals for marine applications



Approval	Standard	Certificate Name
LR Lloyds Register	IEC 61984	LR22429487TA

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 770-502/042-000





Documentation

Bid Text			
770-502/042-000	19.02.2019	xml 2.74 KB	↓
770-502/042-000	12.03.2015	doc 23.50 KB	↓

CAD/CAE-Data

CAD data	
2D/3D Models 770-502/042-000	↓

CAE data	
WSCAD Universe 770-502/042-000	↓
ZUKEN Portal 770-502/042-000	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 210-333
Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white