
Data Sheet | Item Number: 890-512

Strain relief housing; 2-pole; with locking clip; for 1 cable; 3.8 ... 8.2 mm; 30 mm; white



https://www.wago.com/890-512



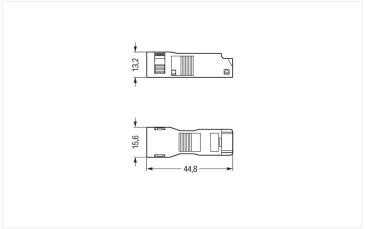

Dimensions in mm

Strain relief housing WINSTA® MINI 2-pole

The strain relief housing from the WINSTA® MINI product line guarantees you the greatest possible flexibility in electrical installation. An extensive range of accessories rounds out the WINSTA® product line from WAGO. Due to its particularly compact dimensions, our WINSTA® MINI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology is very suitable in very tight spaces, i.e., for connections when very little room is available. The strip length is 32 mm.

Lower costs through fast commissioning and elimination of service expenses – solutions from WINSTA® MINI

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection against mismating from WAGO.

- easy tool-free operation, a wide range of coding options
- · convenient installation and commissioning

Connection data	
Connection 1	
Pole number	2
Connectable sheathed cable diameter	3.8 8.2 mm
Strip length (outer insulation)	32 mm

Physical data	
Width	15.6 mm / 0.614 inches
Height	13.2 mm / 0.52 inches
Depth	44.8 mm / 1.764 inches

Data Sheet | Item Number: 890-512 https://www.wago.com/890-512



Material data	
Note (material data)	
	Information on material specifications can be found here
Color	white
Insulation material	Polyamide (PA66)
Flammability class per UL94	VO
Fire load	0.094 MJ
Weight	2.9 g

Environmental requirements	
Processing temperature	-5+40°C
Continuous operating temperature	-35 +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	50 pcs
Packaging type	Вох
Country of origin	DE
GTIN	4045454233358
Customs tariff number	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals




Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1977	E45171


Data Sheet | Item Number: 890-512

https://www.wago.com/890-512





Documentation			
Bid Text			
890-512	19.02.2019	xml 2.75 KB	<u>↓</u>
890-512	20.11.2014	doc 23.50 KB	\perp

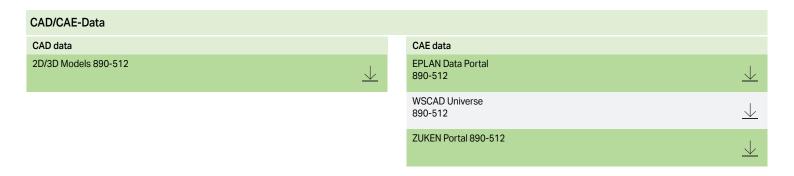

Subject to changes. Please also observe the further product documentation!

Page 3/3 Version 17.11.2023