


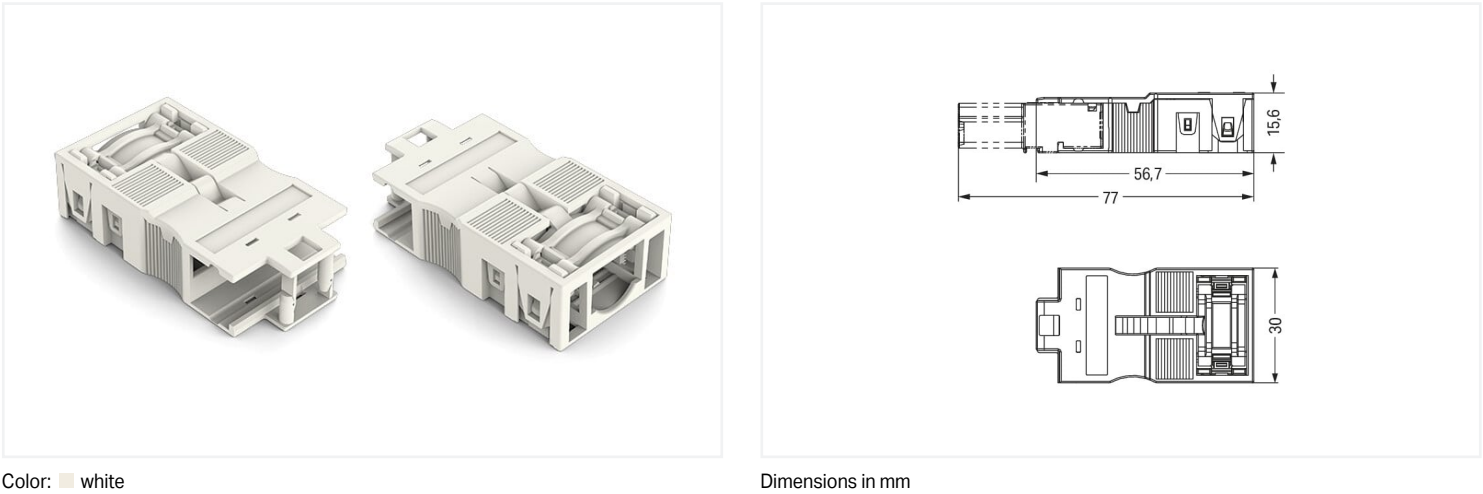

Color: white

Strain relief housing WINSTA® MIDI 3-pole

The strain relief housing from the WINSTA® MIDI product line guarantees you the greatest possible flexibility in electrical installation. An extensive range of accessories complements the WINSTA® product line from WAGO. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is used in a broad range of individual products you can use for quick, easy, flexible, and secure installation. A range up to 48 mm can be used for the strip length.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Now you can also lower installation expenses without compromising safety and quality: with protection against mismatching reduces the need for servicing and prevents unnecessary downtime.

- pre-assembled versions
- convenient installation and commissioning

Connection data	
Connection 1	
Pole number	3
Connectable sheathed cable diameter	7 ... 11.5 mm
Strip length (outer insulation)	48 mm

Physical data	
Width	30 mm / 1.181 inches
Height	15.6 mm / 0.614 inches
Depth	56.7 mm / 2.232 inches



Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.246 MJ
Weight	8.2 g

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821524564
Customs tariff number	85389099990

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates					
General approvals			Approvals for marine applications		
					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1977	E45171	LR Lloyds Register	IEC 61984	LR22429487TA



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
770-513/035-000

↓

Documentation

Bid Text			
770-513/035-000	19.02.2019	xml 2.80 KB	↓
770-513/035-000	04.12.2014	doc 24.00 KB	↓

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 770-513/035-000	WSCAD Universe 770-513/035-000
↓	↓
	ZUKEN Portal 770-513/035-000
	↓

- 1 Compatible Products
- 1.1 Optional Accessories
- 1.1.1 Marking
- 1.1.1.1 Marking strip



Item No.: 210-333
Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white