




Color: ■ green

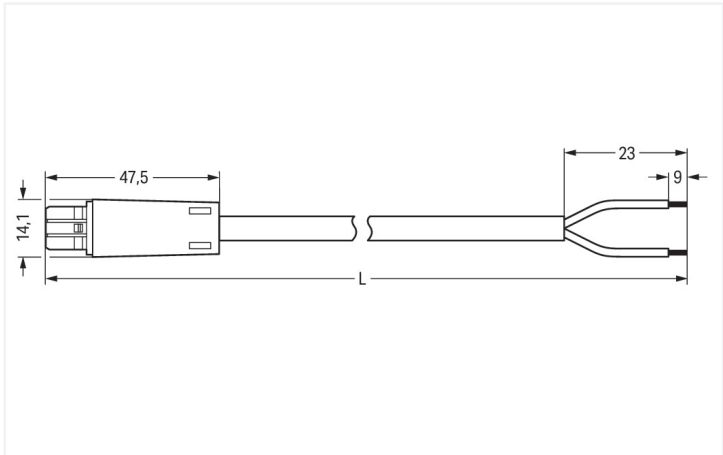

Dimensions in mm

Cable assembly WINSTA® KNX with protection against mismatching

The WINSTA® KNX cable assembly with protection type IP20 provides the foundation for installation of fine-stranded and solid conductors. Whether on PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to make connections according to various requirements in no time flat. The color coding and mechanical coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismatching. The pluggable installation connector is protected in accordance with protection type IP20 (Only when mated and secured with a strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)). That results in the fact that users' fingers will never come into contact with live elements. The harmonised KNX interface represents a manufacturer-independent communication protocol for intelligently networking state-of-the-art home and building system technologies. WINSTA® KNX pluggable installation connectors with E coding are often used in KNX applications. Anyone who needs to worry about technical safety requirements related to fire protection for electrical installation should be able to rely on the quality of the components. Our product satisfies the official safety standards of fire class C. Eliminating halogens as an additive in the production of this cable assembly noticeably improves fire safety and minimises environmental contamination.

Fast, error-free assembly thanks to cable assemblies from WAGO

A socket and a free end are provided. WINSTA® is the pluggable connection system that is optimally tailored to the strict requirements of electrical installation. It ensures fast, secure and, above all, error-free installation of components and cables. Choose quality and durability – the WINSTA® KNX pluggable installation connector with fire class C from WAGO makes the installation of electrical components visibly easier.

- products perfectly tailored to your requirements guarantee safe use
- with E coding for AC and DC applications
- ready to install and use immediately
- quick replacement of defective units during ongoing operation

Notes	
Note	Cables with a different fire class can be found in the eShop.

Electrical data					General information	
Ratings per		IEC/EN 60664-1			Note on contact resistance	Approx. 3 mΩ contact resistance
Overvoltage category		III	III	II		
Pollution degree		3	2	2		
Nominal voltage		50 V	-	-		
Rated surge voltage		0.8 kV	-	-		
Rated current		3 A	-	-		

Connection data

Total number of potentials	2	Connection 1	
Conductor preparation	stripped	Conductor diameter	0.8 mm
		Strip length	9 mm / 0.35 inches
		Pole number	2
		Sheathed cable diameter	5 ... 7 mm
		Strip length (outer insulation)	23 mm
		Connection type	Socket - free end

Physical data

Width	14.1 mm / 0.555 inches
Height	11.1 mm / 0.437 inches
Total length	1 m

Mechanical data

Technology	KNX
Coding	E
Variable coding	No
Marking	1+ 2-
Potential marking	1+ 2-
Mating force of a plug-in connection	Approx. 10 ... 15 N
Retention force of a plug-in connection	when locked: > 80N
Unmating force of a plug-in connection	Unlocked: approx. 15 ... 20 N
Number of mating cycles	200
Connection type	Socket - free end
Type of pre-assembled cable	Connecting cable
Cable type	Y-H(St)Hh 1x2x0.8
Protection type	IP20; Only when mated and secured with a strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)

Plug-in connection

Mismating protection	Yes
Note on mismating protection	All <i>WINSTA</i> ® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole

Material data

Note (material data)	Information on material specifications can be found here
Color	green
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire class per EN 50575	C _{ca}
Contact material	Copper alloy; surface-treated
Contact plating	Tin
Fire load	0 MJ
Connector color	green
Strain relief color	black
Sheathed cable color	green
Printing color of sheathed cable	black



Material data	
Halogen-free	Yes
Silicon-free	Yes
Sheath material	Halogen-free
Rubber cable	No
Weight	43.8 g
Copper weight of the pipe	0.021 kg/m

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data	
ETIM 8.0	EC002587
ETIM 7.0	EC002587
PU (SPU)	1 pcs
Packaging type	unpacked
Country of origin	PL
GTIN	4055143946384
Customs tariff number	85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
894-8392/173-106

↓