




Color: ■ brown

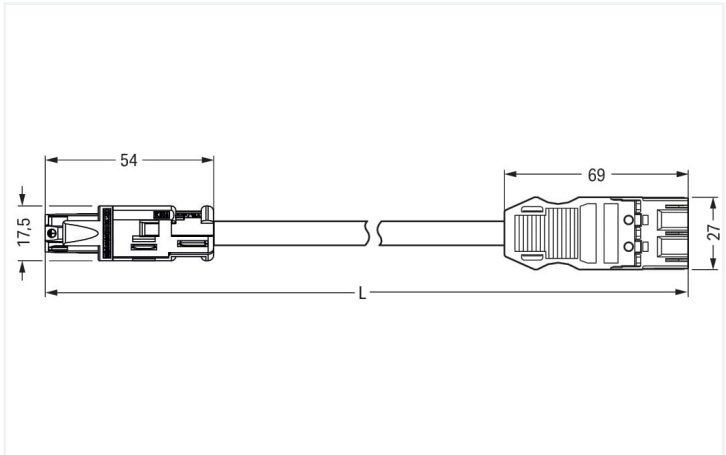

Dimensions in mm

Cable assembly *WINSTA*® RD rated current 16 A

Use effective pluggable connections instead of laborious screw connections: With the *WINSTA*® RD cable assembly 3-pole. For greater protection in electrical installations, the pluggable installation connector is provided with mechanical protection against mismatching. The pluggable installation connector is protected against ingress by solid objects in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). With *WINSTA*® RD, we have created a product line that fits perfectly into conduits or boreholes due to its design. Anyone who needs to take into account technical safety requirements related to fire protection for electrical installation should use only top quality components. Our product satisfies the official safety standards of fire class C. In the production of this cable assembly, we eliminated the use of halogen. That is an important contribution to climate protection.

Fast, secure pluggable connections – cable assemblies from WAGO

The cable assembly is provided with a RD socket and a MIDI plug. *WINSTA*® is the pluggable connection system that is perfectly tailored to the strict requirements of electrical installation. It ensures error-free installation of cables and components, quickly and reliably. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with marking from WAGO.

- protection against mismatching eliminates errors
- products perfectly tailored to your requirements guarantee safe use
- for AC applications
- flexible installation to save space
- fast, secure installation

Notes		
Note	Cables with a different fire class can be found in the eShop.	

Electrical data						
Ratings per		IEC/EN 60664-1			General information	
Overvoltage category	III	III	II		Note on contact resistance	approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/ socket
Pollution degree	3	2	2			
Nominal voltage	250 V	-	-			
Rated surge voltage	4 kV	-	-			
Rated current	16 A	-	-			



Connection data			
Total number of potentials		3	
		Connection 1	
		Pole number	3
		Sheathed cable diameter	7.4 ... 9.4 mm
		Wire cross-section	1.5 mm²
		Connection type	RD socket - MIDI plug
Physical data			
Width		27 mm / 1.063 inches	
Height		17.5 mm / 0.689 inches	
Total length		5 m	
Mechanical data			
Application		Switching function	
Coding		S	
Variable coding		No	
Marking		1 2 L	
Potential marking		L 2 1	
Mating force of a plug-in connection		Approx. 30 ... 70 N (depending on pole number)	
Retention force of a plug-in connection		when locked: > 80N	
Unmating force of a plug-in connection		Unlocked: approx. 30 ... 70 N (depending on pole number)	
Number of mating cycles		200, without resistive load	
Connection type		RD socket - MIDI plug	
Type of pre-assembled cable		Adapter cable	
Cable type		H05Z1Z1-F 3x1.5	
Protection type		IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)	
Plug-in connection			
Mismating protection		Yes	
Note on mismating protection		All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while incorrectly rotated c.) plugging while laterally staggered	
Locking of plug-in connection		Locking lever	
Material data			
Note (material data)		Information on material specifications can be found here	
Color		brown	
Insulation material		Polyamide (PA66)	
Flammability class per UL94		V0	
Fire class per EN 50575		C _{ca}	
Contact material		Copper or copper alloy; surface-treated	
Contact plating		Tin	
Fire load		0.487 MJ	
Connector color		brown	
Strain relief color		black	
Sheathed cable color		black	
Printing color of sheathed cable		white	
Halogen-free		Yes	
Silicon-free		Yes	
Sheath material		Halogen-free	



Material data

Rubber cable	No
Weight	519.5 g
Copper weight of the pipe	0.043 kg/m

Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data

eCl@ss 10.0	27-44-06-04
eCl@ss 9.0	27-44-06-04
ETIM 8.0	EC002587
ETIM 7.0	EC002587
PU (SPU)	1 pcs
Packaging type	unpacked
Country of origin	DE
GTIN	4055143809870
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
CCA CCA KEMA KEUR KEMA KEUR					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61535	NTR NL-7969	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CCA DEKRA Certification B.V.	EN 61984	NTR NL-7848	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
KEMA/KEUR DEKRA Certification B.V.	EN 61535	71-123229			
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-114944			



Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 774-9373/1566-505	