



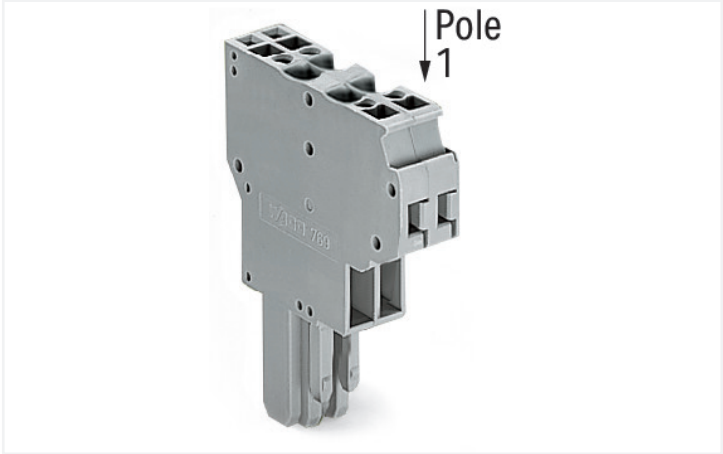

Color: ■ gray

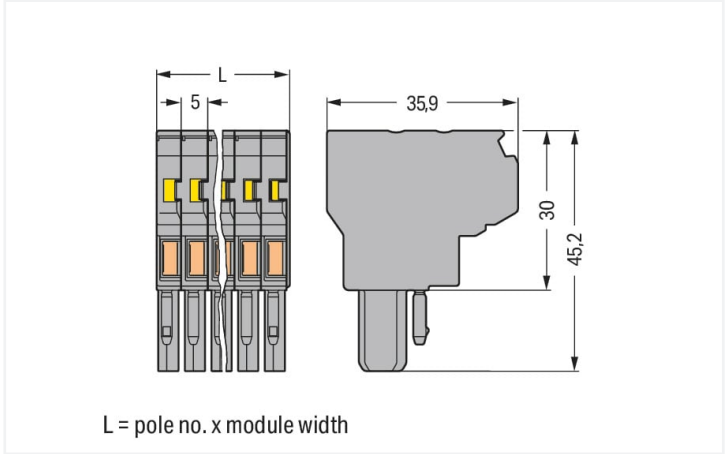

Dimensions in mm

Notes	
Safety information	According to EN 61984, pluggable connectors without current interrupting capacity must not be mated or unmated when live or under load.

Electrical data			
Ratings per		IEC/EN 61984	
Overvoltage category		III	II
Pollution degree		3	2
Nominal voltage		500 V	-
Rated surge voltage		6 kV	-
Rated current		32 A	-

Connection data	
Connection points	4
Total number of potentials	2

Connection 1	
Connection technology	CAGE CLAMP®
Actuation type	Operating tool
Connectable conductor materials	Copper
Nominal cross-section	4 mm² / 12 AWG
Solid conductor	0.08 ... 4 mm² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 4 mm² / 28 ... 12 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Pole number	2
Wiring direction	Front-entry wiring

Physical data

Width	10 mm / 0.394 inches
Height	45.2 mm / 1.78 inches
Depth	35.9 mm / 1.413 inches
Module width	5 mm / 0.197 inches

Mechanical data

Variable coding	Yes
Direct ground contact to DIN-rail/drilled hole/housing	No
Marking level	Side marking
Anti-rotation protection	Yes

Plug-in connection

Contact type (pluggable connector)	Female connector/socket
Connector (connection type)	for conductor
Mismating protection	No
Plugging without loss of pin spacing	Yes

Material data

Note (material data)	Information on material specifications can be found here
Color	gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.194 MJ
Halogen-free	Yes
Weight	10.5 g

Environmental requirements

Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C

Commercial data

Product Group	18 (X-COM-System)
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 8.0	EC001284
ETIM 7.0	EC001284
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	PL
GTIN	4044918473880
Customs tariff number	85366990990



Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60947	NTR NL-7626	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CCA DEKRA Certification B.V.	EN 61984	2190419.02	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CCA DEKRA Certification B.V.	IEC 61984	NL-47799/A1			
CSA CSA Group	C22.2	1101144			
KEMA/KEUR DEKRA Certification B.V.	EN 60947	2190419.01			
UL Underwriters Laboratories Inc.	UL 1977	E 45171			
UR Underwriters Laboratories Inc.	UL 1059	E45172			

Approvals for marine applications		
Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	EN 60947	20-HG1941090-PDA
BV Bureau Veritas S.A.	EN 60947	07436/F0 BV

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 769-122	



Documentation			
Additional Information		Bid Text	
Technical Section	pdf 2240.62 KB	769-122 19.02.2019	xml 3.21 KB
		769-122 04.10.2017	doc 25.50 KB

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 769-122	EPLAN Data Portal 769-122
	WSCAD Universe 769-122
	ZUKEN Portal 769-122

1 Compatible Products

1.1 Optional Accessories

1.1.1 Ferrule

1.1.1.1 Ferrule

Item No.: 216-301 Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow	Item No.: 216-302 Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise	Item No.: 216-201 Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white	Item No.: 216-101 Ferrule; Sleeve for 0.5 mm² / AWG 22; un-insulated; electro-tin plated; silver-colored
Item No.: 216-202 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray	Item No.: 216-102 Ferrule; Sleeve for 0.75 mm² / AWG 20; un-insulated; electro-tin plated; silver-colored	Item No.: 216-203 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red	Item No.: 216-103 Ferrule; Sleeve for 1 mm² / AWG 18; un-insulated; electro-tin plated
Item No.: 216-204 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black	Item No.: 216-104 Ferrule; Sleeve for 1.5 mm² / AWG 16; un-insulated; electro-tin plated; silver-colored	Item No.: 216-206 Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; blue	

1.1.2 Insulation stop

1.1.2.1 Insulation stop

Item No.: 769-470 Insulation stop; 0.08 - 0.2 mm² "s" (0.14 mm² "f-st"); 5 pieces/strip; white	Item No.: 769-471 Insulation stop; 0.25 - 0.5 mm²; 5 pieces/strip; light gray	Item No.: 769-472 Insulation stop; 0.75 - 1 mm²; 5 pieces/strip; dark gray



1.1.3 Jumper

1.1.3.1 Jumper



[Item No.: 280-402](#)
Jumper; insulated; gray



[Item No.: 780-452](#)
Staggered jumper; from 1 to 2; insulated; gray



[Item No.: 780-453](#)
Staggered jumper; from 1 to 3; insulated; gray



[Item No.: 780-454](#)
Staggered jumper; from 1 to 4; insulated; gray



[Item No.: 780-455](#)
Staggered jumper; from 1 to 5; insulated; gray



[Item No.: 780-456](#)
Staggered jumper; from 1 to 6; insulated; gray



[Item No.: 780-457](#)
Staggered jumper; from 1 to 7; insulated; gray



[Item No.: 780-458](#)
Staggered jumper; from 1 to 8; insulated; gray

1.1.4 Locking system

1.1.4.1 Locking system



[Item No.: 769-430](#)
Locking lever; for female connectors; 1 part; Pin spacing 5 mm; 2-pole; gray



[Item No.: 769-431](#)
Locking lever; for female connectors; 1 part; Pin spacing 5 mm; 2-pole; orange

1.1.5 Marking

1.1.5.1 Marker



[Item No.: 2009-145](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



[Item No.: 248-501](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

1.1.6 Protective warning marker

1.1.6.1 Cover



[Item No.: 280-415](#)
Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

1.1.7 Strain relief

1.1.7.1 Strain relief



[Item No.: 769-411](#)
Strain relief plate; for female and male connectors; 1 part; Pin spacing 5 mm; 2- to 3-pole; gray

1.1.8 Test and measurement

1.1.8.1 Testing accessories



Item No.: 210-136
Test plug; 2 mm Ø; with 500 mm cable; red


Installation Notes



2-conductor female plugs


- Common signals from one subassembly to the other (bus structure)
- Can be used as a T-wire branch tap connection (e.g. for lighting wiring)
- Enable a higher number of connection possibilities

Conductor termination




CAGE CLAMP® connection
Female plug: Inserting/removing a conductor via operating tool.
Operation 90° to conductor is also possible.
With ferruled conductors, it is necessary to use a terminal block one size smaller than the conductor's nominal cross-section.

Commoning



Commoning a 2-conductor female plug via staggered jumper and carrier terminal blocks via adjacent jumpers.




- Commoning options of female plugs:**
- After removal, commoned potentials still remain commoned
 - Use of plug-in jumpers instead of additional wired jumpers
 - Can be used as a "hardware" key for safety lockout
 - Can also be used as a commoning jumper for sensor circuits or machine programming

Coding




Coding a female plug by removing coding finger(s) via cutting tool. Do not remove the first and last coding fingers or use an additional locking lever.

Locking system




Locking/releasing a lever.

Strain relief



Removing a female plug via conductor bundle provided with strain relief plate.

Marking



Labeling a female plug with CAGE CLAMP® connection via Mini-WSB Quick Markers.