



Data Sheet | Item Number: 267-412

Conductor support, base; without ground contact; with snap-in mounting feet; 7-pole; 2,50 mm²; white

<https://www.wago.com/267-412>

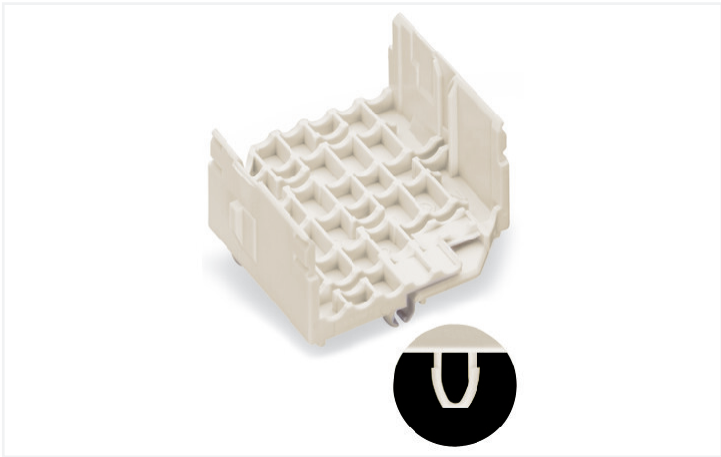

Color: white

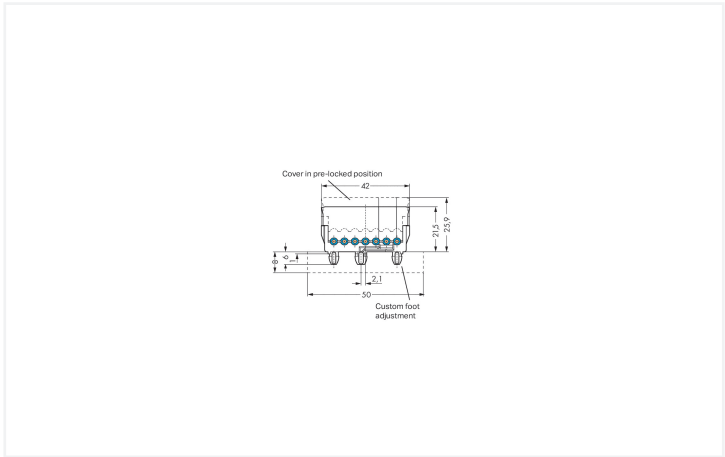

Dimensions in mm

- Flexible, modular 5- to 11-pole connector system
- Future system expansions possible
- Compact design

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated surge voltage	-	4 kV	-
Rated current	-	6 A	-

Connection data

Number of connection types	1	Connection 1	
Number of levels	1	Connection technology	IDC connection
		Solid conductor	1.5 ... 2.5 mm²

Physical data

Width	40 mm / 1.575 inches
Height from the surface	21.5 mm / 0.846 inches
Depth	42 mm / 1.654 inches

Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V2
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact plating	Tin
Fire load	0.143 MJ
Weight	4.9 g

Environmental requirements	
Temperature stability	105 °C

Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 8.0	EC000458
ETIM 7.0	EC000458
PU (SPU)	250 pcs
Packaging type	Bag
Country of origin	CN
GTIN	4050821830290
Customs tariff number	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	NL-47718
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-100641
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309



Downloads			
Environmental Product Compliance			
Compliance Search			
Environmental Product Compliance 267-412			

Documentation			
Additional Information			
Technical Section	03.04.2019	pdf 2010.85 KB	

CAD/CAE-Data			
CAD data		CAE data	
2D/3D Models 267-412		EPLAN Data Portal 267-412	
		ZUKEN Portal 267-412	