

7 Day Digital Heating Programmer

Range

TRT038N	7 Day Digital Heating Programmer – 3 Channel
TRT039N	7 Day Digital Heating Programmer – 4 Channel


Features

- Independently programmed channels
- Suitable for fully pumped systems
- Simple push button control (illuminates on setting)
- 3 timed control periods (5 day plus 2 or 7 day)
- Holiday mode, 1 and 2 hour boost function
- Always ON and OFF override mode
- Blue LED screen illuminates upon setting
- Optional automatic summer and winter changeover
- Voltage free change over contacts
- 24 hour factory fitted rechargeable battery backup

Dimensions

	Height (mm)	Width (mm)	Depth (mm)	Weight (g)
TRT038N	100	150	32	281
TRT039N	100	150	32	290

Line Diagram(s)

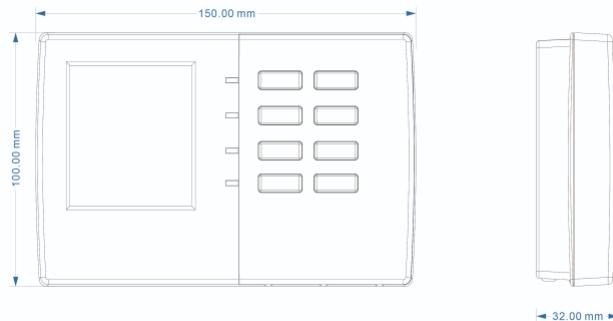

Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface
Earth Class Rating	Class II
Operating Temperature	0°C to 40°C
Connection	3 Wire
Setting Type	Digital
Battery Type	3.6V 40mA Rechargeable
Power Reserve	7 Days
Program Modes	24 Hour/7 Day, Holiday Mode, 1- or 2-Hour Boost
Switch Type	Single Pole, Double Throw (SPDT)
Voltage Free Contacts	Normally Open
Mounting Hole Centres (mm)	60
Standby Consumption	<1.5W
Switch Rating	3A Resistive, 1A Inductive
Shortest Switching Time	1 Minute
Programmable Slots	3 ON, 3 OFF (Per Channel)
Cable Entry(s)	Back Entry
Body Construction	Polycarbonate
Product Colour	White
Accessories (Included)	Raw Plugs, Screws