




Features

- Powerful 6.5W LED energy saving bulkhead light
- Ideal for both indoor and outdoor installation
- Colour temperature: 4000K
- Simple and quick to fit with fast-fix terminal block connection

Dimensions

	Height (mm)	Width (mm)	Depth (mm)	Weight (g)
LED88N	205	108	63.5	300
LED88PIRN	205	108	78.5	323

Line Diagram(s)

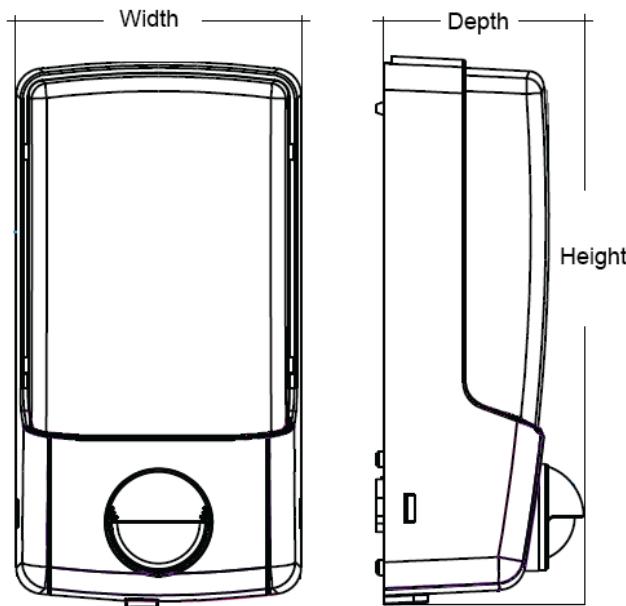

6.5W LED Energy Saver Bulkhead Light

Range

LED88N	6.5W LED Energy Saver Bulkhead Light
LED88PIRN	6.5W LED Energy Saver PIR Bulkhead Light

Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface Mount
Earth Class Rating	Class II
Operating Temperature	-20°C to +40°C
Ingress Protection Rating	IP55
Wattage	6.5
Beam Angle	90° x 90°
Energy Efficiency	Class G
Energy Usage	6.5KwH/1000H
Lumen Output (lm)	500
Luminaire Efficiency	77 lm/W
Colour Temperature (K)	4000
LED Type	SMD (Integrated)
Mounting Hole Centres (mm)	60
Multiple Unit Support	No
Cable Capacity (mm ²)	2.5mm ²
Cable Entry(s)	Back Entry
Body Construction	Polycarbonate
Product Colour	Black
Accessories (Included)	Fittings
LED88PIRN Only:	
Setting Type	Dial
Approved Mounting Height (m)	1.8
Motion Detection (m)	10
Detection Angle	140°
PIR Sensitivity	No
Standby Consumption	<0.3W
ON Time Adjustment	5 Seconds to 10 Minutes
LUX Level	2 to 200, User Adjustable
Detection Range (m)	10
Permanent ON Facility	No
Dusk Till Dawn	Yes