

# Product datasheet

Specifications



## plug-in electromechanical relay - 12.5 mm - 24 V DC - 2 CO

Local distributor code:

395510483

ABR7S37

⚠ Discontinued on: 15 Jun 2023

EAN Code: 3389110720754

⚠ Discontinued

### Main

Range of product	Advantys Telefast ABE7
Product or component type	Plug-in electromechanical relay
Control circuit type	DC
minimum ordered quantity	Set of 4

### Complementary

Width pitch dimension	12 mm
Product compatibility	ABE7R16T370
[Uc] control circuit voltage	24 V
[Ith] conventional free air thermal current	8 A
Threshold tripping voltage	16.8 V at 40 °C
Drop-out voltage	3.6 V at 20 °C
Drop-out current	3.5 mA at 20 °C
Maximum power dissipation per pole	0.6 W
Associated fuse rating	1 A, fast blow
Maximum switching voltage	130 V DC conforming to IEC 60947-5-1 264 V AC 50/60 Hz conforming to IEC 60947-5-1
Electrical durability	500000 cycles, maximum switching current: 1000 mA at 24 V DC-13 10 ms 500000 cycles, maximum switching current: 1300 mA at 230 V AC-15 500000 cycles, maximum switching current: 2500 mA at 230 V AC-12 500000 cycles, maximum switching current: 2500 mA at 24 V DC-12
Minimum switching current	100 mA at $\geq 5$ V
electrical reliability	1e-008
Operating rate in Hz	5 Hz no load 0.5 Hz at le
Mechanical durability	20000000 cycles
[Uimp] rated impulse withstand voltage	2.5 kV conforming to IEC 60947-1
Net weight	0.017 kg

### Environment

Max immunity to microbreaks	5 ms
Dielectric strength	2000 V conforming to IEC 60947-1

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3 cm
Package 1 Width	4 cm
Package 1 Length	1.2 cm
Package 1 Weight	20 g
Unit Type of Package 2	BB1
Number of Units in Package 2	4
Package 2 Height	3.4 cm
Package 2 Width	4.5 cm
Package 2 Length	6 cm
Package 2 Weight	87 g
Unit Type of Package 3	S01
Number of Units in Package 3	40
Package 3 Height	15 cm
Package 3 Width	15 cm
Package 3 Length	40 cm
Package 3 Weight	1.07 kg

## Contractual warranty

Warranty	18 months
----------	-----------

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Use Better

#### Materials and Substances

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

PVC free

Yes

### Use Again

#### Repack and remanufacture

WEEE Label




The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Performance Curves

**Electrical Durability (in Millions of Operating Cycles) Conforming to IEC 60947-5-1**


**DC Loads**

DC12 curves

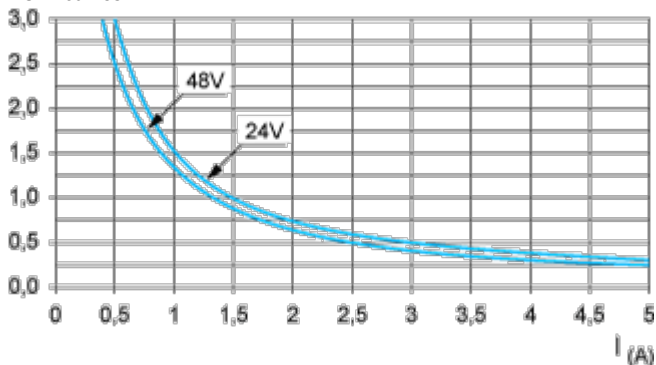

DC12 control of resistive loads and of solid state loads isolated by optocoupler,  $I/R \leq 1 \text{ ms}$ .

DC13 curves

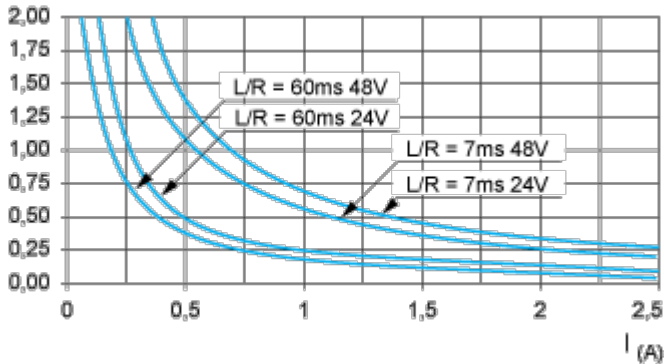


**DC13**

Switching electromagnets,  $L/R \leq 2 \times (U_e \times I_e)$  in ms,  $U_e$ : rated operational voltage,  $I_e$ : rated operational current (with a protective diode on the load, DC12 curves must be used with a coefficient of 0.9 applied to the number in millions of operating cycles)


**AC Loads**

AC12 curves

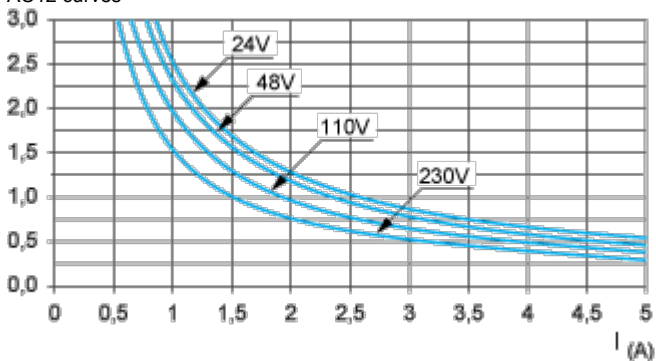


AC12 control of resistive loads and of solid state loads isolated by optocoupler,  $\cos \phi \geq 0.9$ .

AC14 curves

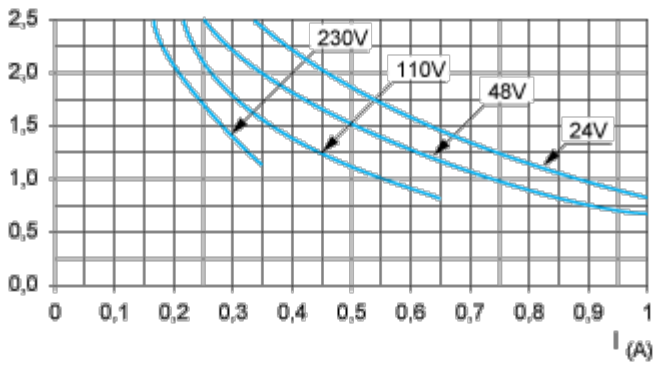

AC14 control of small electromagnetic loads ≤ 72 VA, make: cos φ = 0.3, break: cos φ = 0.3.

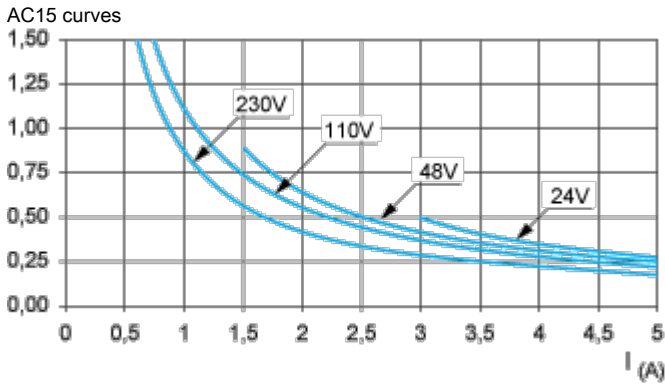

AC15 control of electromagnetic loads > 72 VA, make: cos φ = 0.7, break: cos φ = 0.4.