



MASTER PL-T 2 Pin



MASTER PL-T 26W/840/2P 1CT/5X10CC

Energy saving compact fluorescent lamp Compact long-arc low-pressure mercury discharge lamp Envelope consists of 6 parallel narrow fluorescent tubes

Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Operating and Electrical	
Cap base	GX24D-3 [GX24d-3]	Power (Rated) (Nom)	26.9 W
Life to 10% failures (nom.)	6500 h	Lamp current (nom.)	0.335 A
Life to 50% failures (nom.)	10000 h	Temperature	
LSF 2000 h Rated	99 %	Design temperature (nom.)	28 °C
LSF 4000 h Rated	98 %		
LSF 6000 h Rated	92 %		
LSF 8000 h Rated	78 %		
	Sphere		
Light Technical			
Colour Code	840 [CCT of 4,000 K]		
Luminous flux (nom.)	1800 lm		
Luminous flux (rated) (nom.)	1725 lm		
Colour designation	Cool White (CW)		
Chromaticity coordinate X (nom.)	0.38		
Chromaticity coordinate Y (nom.)	0.38		
Correlated Colour Temperature (Nom)	4000 K		
Luminous efficacy (rated) (min.)	66 lm/W		
Colour rendering index (nom.)	80		
LLMF 2000 h Rated	92 %		
LLMF 4000 h Rated	87 %		
LLMF 6000 h Rated	84 %		
LLMF 8000 h Rated	81 %		

MASTER PL-T 2 Pin

Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Cap-base information	2P
Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) content (max.)	1.4 mg
Mercury (Hg) content (nom.)	1.4 mg
Energy consumption kWh/1,000 hours	27 kWh
	423345

Product Data	
Full product code	871150061113070
Order product name	MASTER PL-T 26W/840/2P 1CT/5X10BOX
EAN/UPC – product	8711500611130
Order code	61113070
Local order code	26PLT8402PINCS
SAP numerator – quantity per pack	1
Numerator – packs per outer box	50
SAP material	927914584071
SAP net weight (piece)	66.000 g
ILCOS code	FSM-26/40/1B-I-GX24d=3


Dimensional drawing




PL-T 26W/840/2P M

Product	D (max)	A (max)	B (max)	C (max)
MASTER PL-T 26W/840/2P 1CT/ 5X10BOX	41 mm	86.7 mm	111.0 mm	134.2 mm

Photometric data

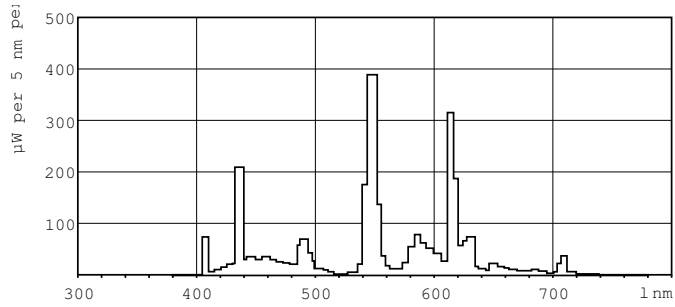



Lightcolour /840

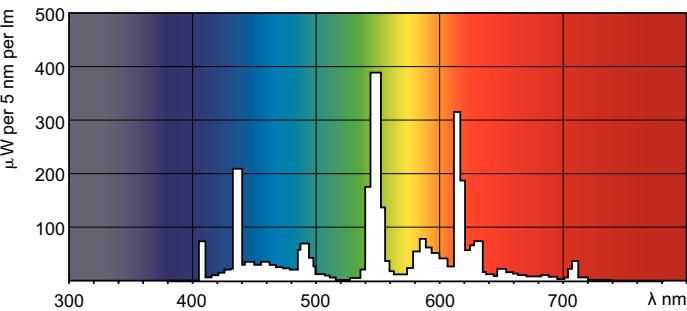

Lightcolour /840


MASTER PL-T 2 Pin

Lifetime

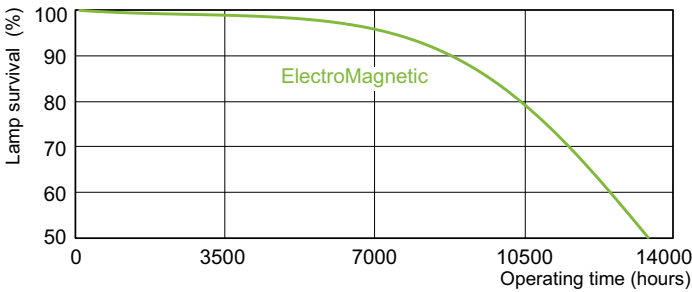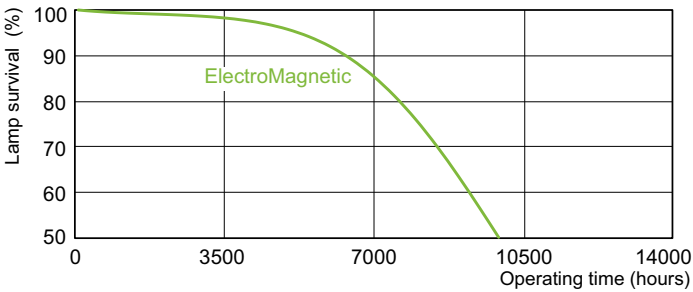

LDLE_PLT2PN_0001-Life expectancy diagram

LDLE_PLT2PN_0002-Life expectancy diagram

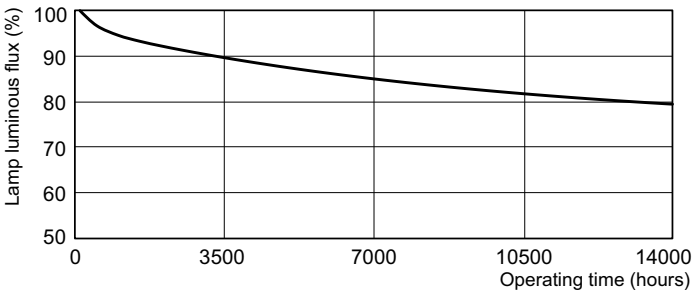

LDLM_PLT2PN_0001-Lumen maintenance diagram

