

VEGAS PRO LED 24V WHITE

9.6W, IP20, IP67





PRODUCT INFORMATION DOCUMENT

CONSTRUCTION

- FPC copper substrate PCB
- 1000mm 2x18AWG input wires
- 3M self-adhesive tape

FEATURES

- Easy to install strips supplied in 50m (IP20) or 30m (IP67) reels
- 2200K, 3000K, 4000K single colour options
- IP20 and IP67 versions for indoor and outdoor applications
- Can be cut every 5cm and reconnected as required with maximum continuous strip length of 10m
- Choose from wide range of power supplies to match the length of used striplight
- Remote and wall mounted controllers available as accessories



Product Code:	IP20 RVA96302050	IP20 RVA96402050	IP67 RVA96226730	IP67 RVA96306730	IP67 RVA96406730
Comparable to:	NA	NA	NA	NA	NA
Total Power (W/m):	9.6	9.6	8.7	9.6	9.6
Power Factor:	NA	NA	NA	NA	NA
Total Light Output (lm):	1070	1070	620	990	995
Total Emergency Light Output (lm):	NA	NA	NA	NA	NA
Efficacy (lm/cctW):	111	112	71	103	104
Lux at 1m (lux):	360	360	180	300	300
Emergency Lux at 1m (lux):	NA	NA	NA	NA	NA
CCT (K):	3000	4000	2200	3000	4000
CRI:	80	80	80	80	80
SDCM:	6	6	6	6	6
UGR:	30.7	31.0	26.4	29.4	29.8
IP:	20	20	67	67	67
Operation Temperature (°C):	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40
Inrush Current:	NA	NA	NA	NA	NA
Energy Class:	F	F	G	G	F
Rated Life to L70B50 (Hrs):	50000	50000	50000	50000	50000
Dimensions LxWxH (mm):	50000x8x1.5	50000x8x1.5	30000x10x3	30000x10x3	30000x10x3
Weight Per 1m(kg):	0.02	0.02	0.06	0.06	0.06

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
WEB: ROBUS.COM
WEB: ROBUS.COM.AU
WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA

VEGAS PRO LED 24V WHITE

9.6W, IP20, IP67

Cone Illuminance Diagram

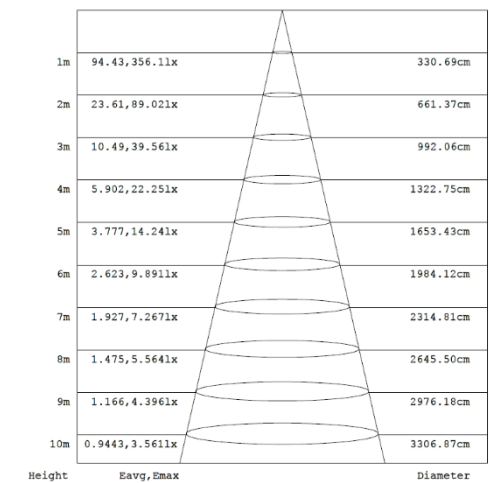


Diagram for RVA96402050 in 4000K. Other diagrams available on request

Polar Intensity Diagram


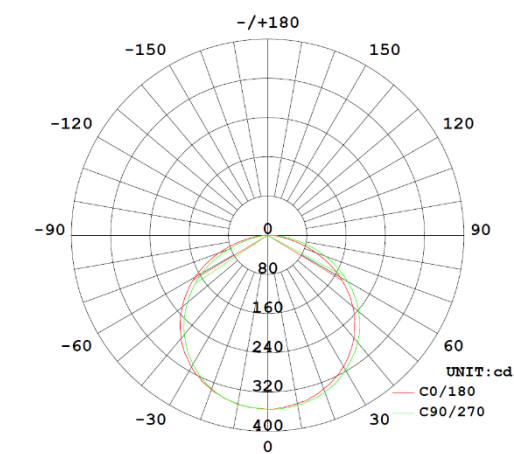


Diagram for RVA96402050 in 4000K. Other diagrams available on request

Dimension Diagram

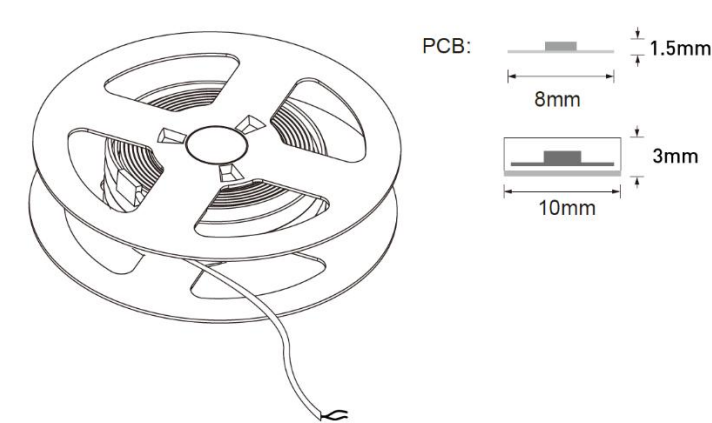

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000 WEB: ROBUS.COM
UK: TEL: 0800 973 220 WEB: ROBUS.COM
AUS: TEL: +61 7 3890 5444 WEB: ROBUS.COM.AU
NZ: TEL: +64 03 668 5285 WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA