


Product datasheet

Specifications

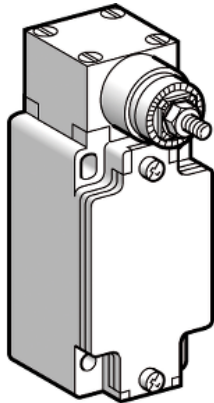

limit switch body ZCKJ - rotary head w/o lever - fixed - 2C/O - snap - M20

Local distributor code: 20538264 ZCKJ404H29

Main

Range of product	Telemecanique Limit switches XC Standard
Series name	Standard format
Product or component type	Limit switch body with spring return rotary head
Device short name	ZCKJ
Body type	Fixed
Product compatibility	XCKJ
Body material	Metal
Cable entry	1 entry tapped for M20 x 1.5 cable gland
Number of poles	2
Contacts type and composition	2 C/O
Contact operation	Snap action
Number of steps	2 3 positions
Contacts material	Silver plated contacts

Complementary

Switch actuation	From left and right
Local display	Without
Electrical connection	Screw-clamp terminals, clamping capacity: 1 x 0.75...2 x 1.5 mm²
Positive opening	Without
Minimum actuation speed	0.01 m/min
[Ie] rated operational current	3 A at 240 V, AC-15, A300 conforming to EN/IEC 60947-5-1 appendix A 0.27 A at 250 V, DC-13, Q300 conforming to EN/IEC 60947-5-1 appendix A
[Ithe] conventional enclosed thermal current	10 A
[Ui] rated insulation voltage	500 V (pollution degree 3) conforming to IEC 60947-1 for contact block 300 V conforming to CSA C22.2 No 14 for contact block 300 V conforming to UL 508 for contact block
Maximum resistance across terminals	0.25 mOhm conforming to IEC 60255-7 category 3
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60664 6 kV conforming to IEC 60947-1
Short-circuit protection	10 A cartridge fuse, type gG

Electrical durability	5000000 cycles, DC-13 120 V, 4 W, operating rate <60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C 5000000 cycles, DC-13 24 V, 10 W, operating rate <60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C 5000000 cycles, DC-13 48 V, 7 W, operating rate <60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C
Width	43 mm
Height	109 mm
Depth	60 mm
Net weight	0.465 kg
Terminals description ISO n°1	(11-12)NC (23-24)NO (13-14)NO (21-22)NC

Environment

IP degree of protection	IP66
IK degree of protection	IK07
Ambient air temperature for operation	-40...70 °C for low temperature
Ambient air temperature for storage	-40...70 °C
Environmental characteristic	Low temperature

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	485.0 g
Package 1 Height	4.3 cm
Package 1 width	12.8 cm
Package 1 Length	6.7 cm
Unit Type of Package 2	S02
Number of Units in Package 2	18
Package 2 Weight	8.987 kg
Package 2 Height	15 cm
Package 2 width	30 cm
Package 2 Length	40 cm
Unit Type of Package 3	PAL
Number of Units in Package 3	288
Package 3 Weight	187.392 kg
Package 3 Height	60 cm
Package 3 width	80 cm
Package 3 Length	288 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration

Mercury free	Yes
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Contractual warranty	
Warranty	18 months