


# Product datasheet

Specifications

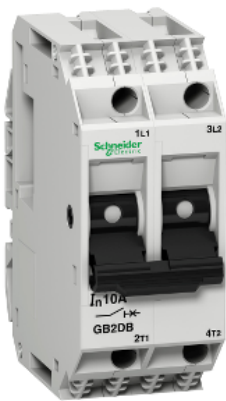

## Thermal magnetic circuit breaker, TeSys GB2, 2P, 3 A, Icu 3 kA@415 V

Local distributor code: 386186965    GB2DB08

### Main

Range	TeSys
Product name	TeSys GB2
Device short name	GB2
Product or component type	Circuit breaker
Device application	Control
Poles description	2P
Network type	AC/DC
Utilisation category	Category A conforming to IEC 60947-2 DC-12 conforming to IEC 60947-5-1 DC-13 conforming to IEC 60947-5-1
Network frequency	50/60 Hz conforming to IEC 60947-2
Breaking capacity	10 kA Icu at 110 V AC 50/60 Hz conforming to IEC 60947-2 3 kA Icu at 230/240 V AC 50/60 Hz conforming to IEC 60947-2 3 kA Icu at 400/415 V AC 50/60 Hz conforming to IEC 60947-2 1.5 kA Icu at 24 V DC conforming to IEC 60947-2 1 kA Icu at 48 V DC conforming to IEC 60947-2
[Ics] rated service short-circuit breaking capacity	50 % at 110 V AC 50/60 Hz conforming to IEC 60947-2 50 % at 230/240 V AC 50/60 Hz conforming to IEC 60947-2 50 % at 400/415 V AC 50/60 Hz conforming to IEC 60947-2
Trip unit technology	Thermal-magnetic
Magnetic tripping current	40 A

### Complementary

Mounting mode	By clips
Mounting support	Rail Plate
Mounting position	Vertical Horizontal
Control type	Toggle
[In] rated current	3 A
[Ue] rated operational voltage	415 V AC 50/60 Hz conforming to IEC 60947-2 48 V DC
[Uimp] rated impulse withstand voltage	4 kV conforming to IEC 60947-2
Power dissipation per pole	2 W
Mechanical durability	8000 cycles

Electrical durability	8000 cycles
Connections - terminals	Connector 1 cable(s) 0.75...6 mm²solid without cable end Connector 2 cable(s) 0.75...4 mm²solid without cable end Connector 1 cable(s) 0.75...4 mm²flexible with cable end Connector 2 cable(s) 0.75...2.5 mm²flexible with cable end
Tightening torque	1.2 N.m on connector
Mechanical robustness	Shocks: 22 Gn for 20 ms conforming to IEC 60068-2-27 Vibrations: 5 Gn, 5...110 Hz conforming to IEC 60068-2-6
Quantity per set	Set of 3
9 mm pitches	4
Height	74 mm
Width	30 mm
Depth	70 mm
Net weight	0.115 kg

### Environment

Standards	EN/IEC 60947-1 EN/IEC 60947-2
Protective treatment	TC
IP degree of protection	IP20 conforming to IEC 60529
Ambient air temperature for operation	-20...60 °C
Ambient air temperature for storage	-40...80 °C
Fire resistance	960 °C conforming to IEC 60695-2-1
Operating altitude	3000 m

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	107.0 g
Package 1 Height	8 cm
Package 1 width	8.5 cm
Package 1 Length	9.6 cm
Unit Type of Package 2	BB1
Number of Units in Package 2	3
Package 2 Weight	342.0 g
Package 2 Height	8 cm
Package 2 width	8.5 cm
Package 2 Length	9.6 cm
Unit Type of Package 3	S02
Number of Units in Package 3	36
Package 3 Weight	4.43 kg
Package 3 Height	15 cm
Package 3 width	30 cm
Package 3 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------