

Product datasheet

Specifications



Serial link module with 2 RS-485/232 ports in Modbus and Character mode

Local distributor code: 393393301 BMXNOM0200

Main

Range of product	Modicon X80
Product or component type	Serial links module
Concept	Serial link
Integrated connection type	RS232 RJ45 115.2 kbit/s 8 wires RS485 RJ45 57.6 kbit/s 1 twisted pair
Protective treatment	TC

Complementary

Supply	Internal power supply via rack
Marking	CE
Local signalling	1 LED (red) for module fault (ERR) 1 LED (green) for module running (RUN) 1 LED (green) for activity on the serial link (SER COM 0) 1 LED (green) for activity on the serial link (SER COM 1)
Current consumption	80 mA at 24 V DC
Module format	Standard
Net weight	0.23 kg

Environment

Ambient air temperature for operation	0...60 °C
Relative humidity	10...95 % without condensation
IP degree of protection	IP20
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	218.0 g
Package 1 Height	5.5 cm
Package 1 width	11 cm
Package 1 Length	11.5 cm

Unit Type of Package 2	S02
Number of Units in Package 2	15
Package 2 Weight	3.585 kg
Package 2 Height	15 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------

Modules Mounted on Racks

Dimensions

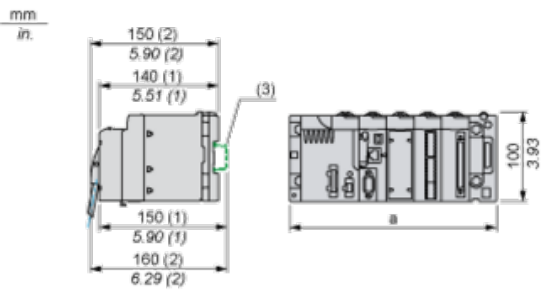

- (1) With removable terminal block (cage, screw or spring).
- (2) With FCN connector.
- (3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81