



MASTER LEDspot MV

MASTER LED spot VLE DT 3.7-35W GU10 927 36D

Delivering a warm, halogen-like accent beam, MASTER LEDspot MV is a perfect fit for spot lighting (track, corridors, lift lobbies, display cases and cabinets) in the hospitality industry. It is particularly suitable to public areas where the light is on 24/7, such as lobbies, corridors, stairwells. MASTER LEDspot MV delivers huge energy savings and minimises maintenance cost without any compromise on brightness, enabling hospitality owners to achieve a return on their investment within one year. These LEDspots are compatible with most existing fixtures with a GU10 holder and designed as a retrofit replacement for halogen or incandescent spots. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere. For environments where the right atmosphere needs to be created (e.g. bars and restaurants), the “DimTone” feature could be useful. This is a LED feature that creates a warmer tone once light is dimmed down to lower intensities.

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights


Product data

General Information			
Cap base	GU10 [GU10]	Beam Angle (Nom)	36 °
EU RoHS compliant	Yes	Luminous flux (nom.)	260 lm
Nominal lifetime (nom.)	25000 h	Luminous intensity (nom.)	500 cd
Switching cycle	50,000X	Colour designation	Warm white (WW)
Technical type	3.7-35W	Correlated Colour Temperature (Nom)	2700 K
Light Technical		Luminous efficacy (rated) (nom.)	78.38 lm/W
Colour Code	922-927 [CCT of 2,200 K-2,700 K]	Colour consistency	<6
		Colour rendering index (nom.)	90
		LLMF at end of nominal lifetime (nom.)	70 %

MASTER LEDspot MV


Luminous flux in 90° cone (rated)	260 lm
Operating and Electrical	
Input frequency	50 to 60 Hz
Power (Rated) (Nom)	3.7 W
Lamp current (nom.)	20 mA
Wattage equivalent	35 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light (nom.)	0.5 s
Power factor (nom.)	0.8
Voltage (Nom)	220-240 V
Temperature	
T-Case maximum (nom.)	80 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb shape	PAR16 [PAR 2 inch]

Dimensional drawing



GU10 230V4W-35W230lm36D 22-2700K GU10Dim


Photometric data

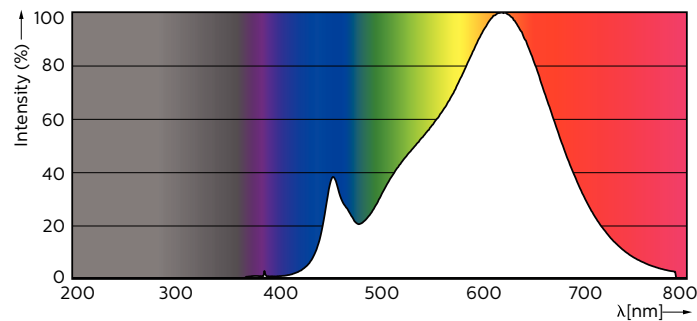

MASTER LEDspotMV GU10 922-927 36D

Approval and Application	
Suitable for accent lighting	Yes
Energy consumption kWh/1,000 hours	4 kWh
Product Data	
Full product code	871869670809500
Order product name	MASTER LED spot VLE DT 3.7-35W GU10 927 36D
EAN/UPC – product	8718696708095
Order code	70809500
SAP numerator – quantity per pack	1
Numerator – packs per outer box	10
SAP material	929001350002
SAP net weight (piece)	0.038 kg


Product	D	C
MASTER LED spot VLE DT 3.7-35W GU10 927 36D	50 mm	54 mm



MASTER LEDspotMV 35W GU10 922-927 36D


MASTER LEDspot MV

Photometric data



MASTER LEDspotMV 35W GU10 922-927 36D

Lifetime

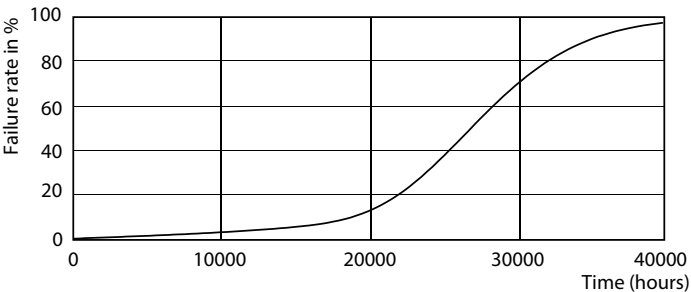

MASTER LEDspotMV GU10 922-927 36D

MASTER LEDspotMV GU10 922-927 36D

