

Technical Specification

Product Code: CMA012AG

Description: 10AX 2 Gang 2 Way Plate Switch

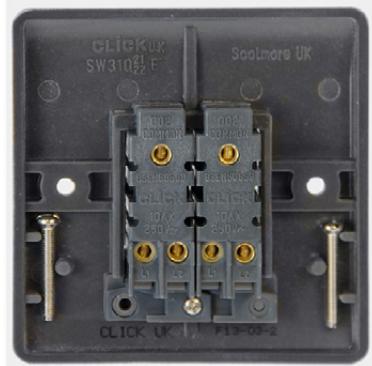
**General Information**

Plate Dimensions (mm)	86 (W) x 86 (H) x 9.5 (D)
Plate Fixing Centres - Horizontal (mm)	60.3
MiniGrid Plate (Gang)	1
MiniGrid Single Width Module Quantity	2
MiniGrid Double Width Module Quantity	1
Style	Rounded Profile
Finish	Anthracite Grey
Switch Finish	Polar White
Materials	Front Plate & Rocker Switch: Urea Terminals: Brass Contacts: Silver "on-lay" Copper / Brass
Anti Microbial Certified	Yes
Rated Voltage (V~) (Ue)	250
Inductive Load Rating (AX)	10
Load Rating Comments	Suitable for Inductive Loads
Termination Type	Screw
Terminal Size (mm)	Ø3.5
Terminal Capacity - Solid (mm ²)	4 x 1.5 or 2 x 2.5
Modular Rocker Switches	Yes
2 Way Switch	Yes
Minimum Back Box Depth (mm)	16
Ingress Protection	IP20
Operational Temperature (°C)	-5 to +40
Warranty (Years)	20

Standards BS EN 60669-1**Additional Information**

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white & grey moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases as well as anti-viral properties against enveloped and non-enveloped viruses.

All products have been independently tested with 99.9% of enveloped viruses and 92% of non-enveloped viruses killed off whilst achieving a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.

Interchangeable with modules in the MiniGrid Range.

MINIGRID®**CE** UK
CA