
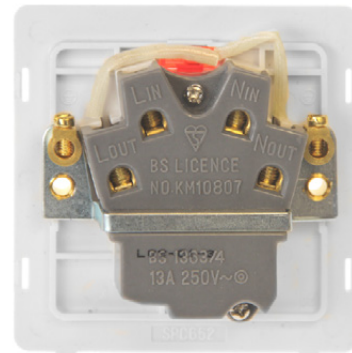


Product Code: SIN652BK

Description: 13A Double Pole Switched Fused Connection Unit With Neon Insert

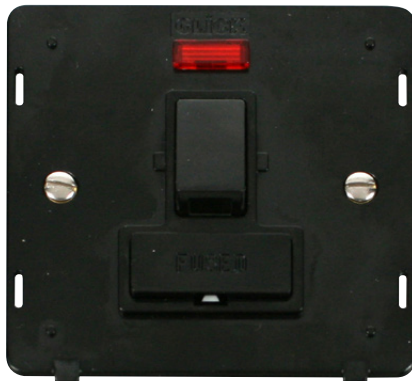

General Information

Insert Dimensions (mm) 82.5 (W) x 82.5 (H) x 2.5 (D)
Plate Fixing Centres - Horizontal (mm) 60.3

Style Screwless Insert

Insert Colour Black

Compatible Cover Plate SCP252#

Materials Insert : Polycarbonate

Rear Housing: Urea

Terminals: Brass

Contacts: Silver "on-lay" Copper / Brass

Earth Strap: Mild Steel

Rear Housing: Urea

Neon Lens: Polycarbonate

Terminal Screws: Steel & Yellow Passivated

Internal Busbars: Formed Pressed Brass

Anti Microbial Certified No

Rated Voltage (V~) (Ue) 250

Resistive Load Rating (A) 13

Termination Type Screw

Terminal Size (mm) Ø5

Terminal Capacity - Solid (mm²) 3 x 2.5 or 2 x 4

Switched Yes

Double Pole Switch Yes

Twin Earth Terminals Yes

Neon Indicator Yes

Minimum Back Box Depth (mm) 35

Ingress Protection IP20

Operational Temperature (°C) -5 to +40

Warranty (Years) 10

Frequency (Hz) 50

Terminal Torque Value (Nm) 2

Indicator Colour Red

Standards BS 1363-4
BS 1362

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Product Code: SCP252**


Description: 13A Switched Fused Connection Unit With Neon Cover Plate

General Information

Dimensions (mm)	86 (W) x 86 (H) x 4 (D)
Finishes Available	BS (Brushed Stainless), CH (Polished Chrome), SS (Stainless Steel), MB (Metal Black), MW (Metal White), BK (Matt Black) & PW (Polar White)
Plate Materials	Decorative & Metal Black or White: Stainless Steel, Black & Polar White: Polycarbonate



SCP252BS




SCP252CH



SCP252SS



SCP252MB



SCP252MW



SCP252BK



SCP252PW

UK Design Registration: 3015621