


Product Code: SIN722BKBS

Description: 20A Ingot Double Pole Plate Switch Insert

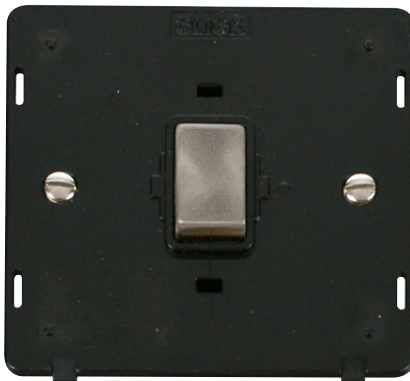

General Information

Insert Dimensions (mm) 82.5 (W) x 82.5 (H) x 2.5 (D)
Plate Fixing Centres - Horizontal (mm) 60.3

Style Screwless Insert
Finish Brushed Stainless

Insert Colour Black

Compatible Cover Plate SCP422#

Materials Insert : Polycarbonate
 Switch Cover: Stainless Steel
 Terminal Screws: Steel & Yellow Passivated
 Internal Busbars: Formed Pressed Brass

Rear Housing: Urea
 Terminals: Brass
 Contacts: Silver "on-lay" Copper / Brass
 Earth Strap: Mild Steel

Anti Microbial Certified No
Rated Voltage (V~) (Ue) 250
Resistive Load Rating (A) 20
Termination Type Screw
Terminal Size (mm) Ø5
Terminal Capacity - Solid (mm²) 3 x 2.5
Double Pole Switch Yes
Twin Earth Terminals Yes
Minimum Back Box Depth (mm) 35
Ingress Protection IP20
Operational Temperature (°C) -5 to +40
Warranty (Years) 10

Frequency (Hz) 50

Terminal Torque Value (Nm) 1.8

Standards BS EN 60669-1

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
 Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Product Code: SCP422**

Description: 20A Plate Switch Cover Plate

General Information

Dimensions (mm)	86 (W) x 86 (H) x 4 (D)
Finishes Available	BS (Brushed Stainless), CH (Polished Chrome), SS (Stainless Steel), MB (Metal Black), MW (Metal White), BK (Matt Black) & PW (Polar White)
Plate Materials	Decorative & Metal Black or White: Stainless Steel, Black & Polar White: Polycarbonate



SCP422BS



SCP422CH



SCP422SS



SCP422MB



SCP422MW



SCP422BK



SCP422PW

UK Design Registration: 3015621