


Product Code: SIN504BKSS

Description: 45A Ingot 2 Gang Double Pole Switch With 13A Double Pole Switched Socket Outlet Insert

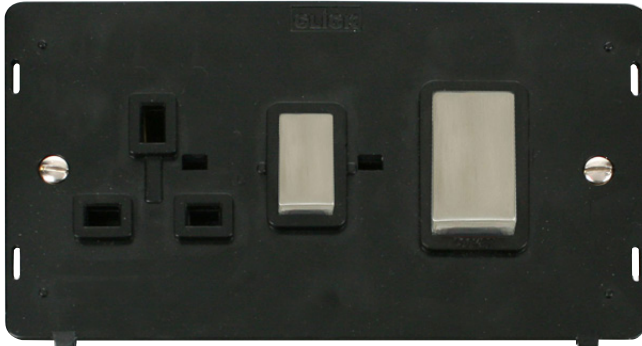

General Information

Insert Dimensions (mm)	142.5 (W) x 82.5 (H) x 2.5 (D)	
Plate Fixing Centres - Horizontal (mm)	120.6	
Style	Screwless Insert	
Finish	Stainless Steel	
Insert Colour	Black	
Compatible Cover Plate	SCP204#	
Materials	Insert: Polycarbonate Switch Cover: Stainless Steel Contacts: Silver "on-lay" Copper / Brass Earth Strap: Mild Steel	Rear Housing: Urea Terminal Screws: Steel & Yellow Passivated Internal Busbars: Formed Pressed Brass
Anti Microbial Certified	No	
Rated Voltage (V~) (Ue)	250	Frequency (Hz) 50
Resistive Load Rating (A)	45	
Termination Type	Screw	
Terminal Size (mm)	Ø6	Terminal Torque Value (Nm) 2.5
Terminal Capacity - Solid (mm²)	1 x 16	
Double Pole Switch	Yes	
Twin Earth Terminals	Yes	
Product Marking	Cooker	
Minimum Back Box Depth (mm)	47	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	10	

Standards BS 4177

Additional Information	For cleaning / polishing of products, use only a soft, dry, clean cloth. Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
-------------------------------	--

Product Code: SCP204**

Description: 1 Gang GridPro® Frontplate

General Information


Dimensions (mm)	146 (W) x 86 (H) x 4 (D)
Finishes Available	BS (Brushed Stainless), CH (Polished Chrome), SS (Stainless Steel), MB (Metal Black), MW (Metal White), BK (Matt Black) & PW (Polar White)
Plate Materials	Decorative & Metal Black or White: Stainless Steel, Black & Polar White: Polycarbonate



SCP204BS




SCP204CH

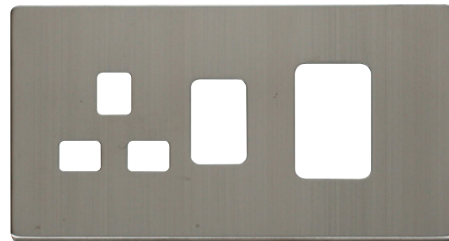


SCP204SS




SCP204MB

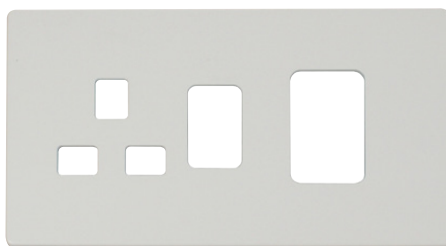

SCP204MW

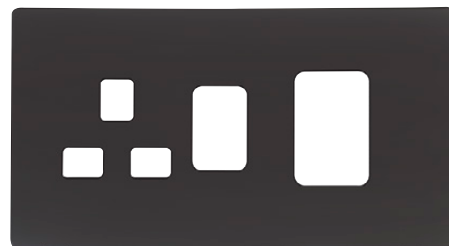

SCP204BK

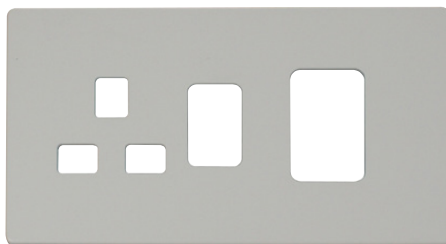

SCP204PW

UK Design Registration: 3015621