



## Main

Range of product	Telemecanique Cabling components
Accessory / separate part category	Cabling accessories
Accessory / separate part type	Connector
Electrical connection	Straight female connector M8, 3 pins
Collar material	Metal
Status LED	Without
Cable connection	Solder terminal / wire size <0.25 mm² / clamping capacity 5 mm

## Complementary

Cable gland type	M9.5
Cable connector fixing	Screw-on
[Ue] rated operational voltage	60 V AC 75 V DC
[In] rated current	4 A
Enclosure material	Plastic
Minimum insulating resistance	1 GΩ
Contact resistance	5000 μOhm
Net weight	0.01 kg

## Environment

IP degree of protection	IP67
Ambient air temperature for operation	-40...85 °C

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.8 cm
Package 1 Width	2.5 cm
Package 1 Length	7.4 cm
Package 1 Weight	10.0 g
Unit Type of Package 2	S01
Number of Units in Package 2	50
Package 2 Height	15.0 cm
Package 2 Width	15.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	609.0 g


Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>

Contractual warranty

Warranty	18 months
----------	-----------

## Dimensions

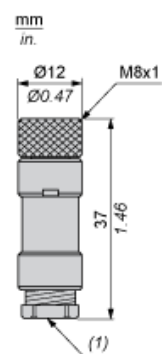

(1) Cable gland : M9.5 x 1

---

## Connections and Schemes

---

