


Product Code: 1920MX01

Description: 20M x 19mm (10 Pack) Mixed Phase Colours

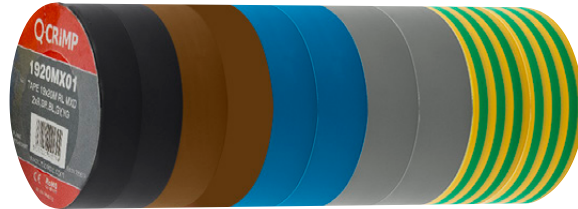

Dimensions

Length (M)	20
Width (mm)	19
Tape Thickness (mm)	0.13 ± 0.01

General Information

Colour	Mixed
Pack Colours	(10 Pack) 2 x Black, Brown, Blue, Grey, Yellow/Green
Elongation Break (%)	160
Breakdown Voltage (kV)	6
Dielectric Strength (kV/mm)	40
Elongation Break (%)	160
Minimum Tensile Strength (N/Inch)	40
Flammability	Self Extinguishing
Temperature Rating (°C)	0 to +70

Materials

Tape: PVC (Polyvinyl Chloride)
Adhesive: Natural Rubber

Additional Information

Adhesion to Steel: 1.6 minimum (N/10mm width) (4N/inch)
Adhesion to Backing: 1.2 minimum (N/10mm width)
Adhesion at Low Temp: 1.5 minimum (N/10mm width) (-10°C)

Standards

BS EN 60454-1: 1995
BS EN 60454-2: 2007
BS EN 60454-3-1: 1998

Statutory Instruments / Directives

UK SI 2012 No. 3032 RoHS: 2011/65/EU & 2015/863/EU
REACH: 1907/2006/EU

