


Fire Rated Clip




A time and labour saving fire rated cable fastener for direct suspension of cables to ceilings or walls.

FEATURES / BENEFITS


- **Quick** - direct fixing of cables to ceilings and walls
- **Fire resistant** - rated to 30 minutes
- **Ready-to-use** - supplied with a fire rated concrete screw
- **Versatile** – single sided and double sided clip for various amounts of cable
- **Labour saving** - considerably simplified installation when compared to tray and basket
- **Secure** - wire is flexible to allow easy installation of cable, and durable to secure once in place

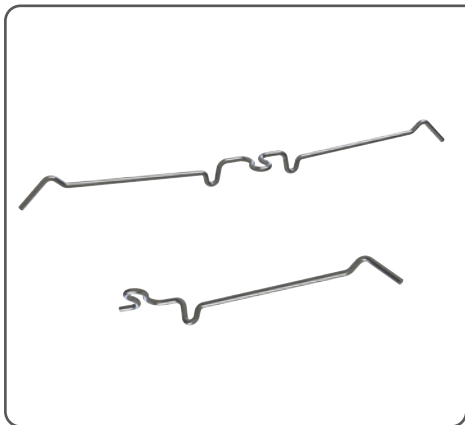

INSTALLATION & ADJUSTMENT

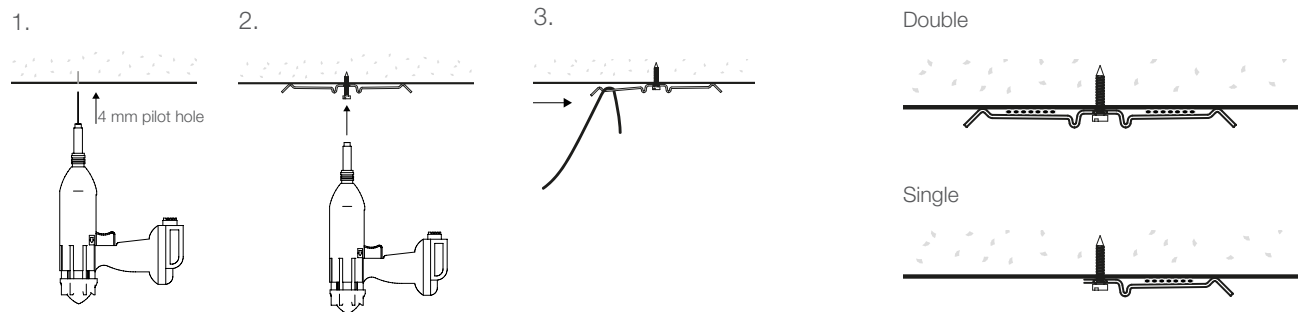

SPECIFICATION

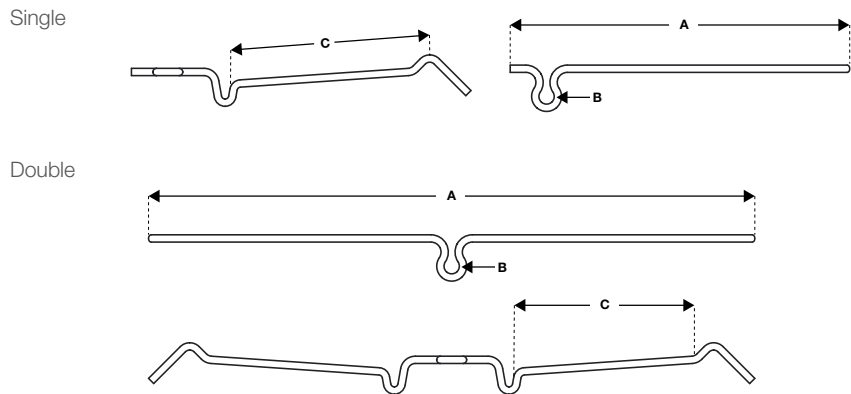

	A	B	C
Single	145 mm	Ø 6.85 mm	80 mm
Double	260 mm	Ø 6.85 mm	80 mm

	1.5 mm ²	2.5 mm ²	4 mm ²
Single	8 T&E Cables	7 T&E Cables	5 T&E Cables
Double	16 T&E Cables	14 T&E Cables	10 T&E Cables

MOUNTING METHODS



Fire rated concrete screw
(120 mins)

For more information please contact us or visit
www.gripplE.com

SUBMITTAL INFORMATION

Concrete Screw - 40 mm x 5.1 mm,
970 °C (2 hours) 1200 °C melting point

Washer - Galvanised Steel

Wire Clip - 3.66 mm Stainless Steel
316 542. Fire Tested to 30 min in-line
with BS7671:2018 direct fix spacing
requirements

SWL
0.24 kg Single, 2 x 0.24 kg Double

PI-FIRERATEDCLIP-ENG-2643
Published March 2020

www.gripplE.com

GripplE's policy is one of continuous development and innovation.
We therefore reserve the right to alter specifications, etc. without notice.

GripplE Ltd | The Old West Gun Works | Savile Street East | Sheffield S4 7UQ
Tel 0800 018 4264 Fax 0114 275 1155 Email info@gripplE.com

