


wall mounting socket outlet, switched, interlocked - housing dimensions 170x90



Product description	
BALS-Prd.-Nr	16165
EAN	4024941161657
Product group	Quick-Connect wall mounting socket outlet, switched, interlocked
Current	16A
Number of poles	3p
Arrangement of the phases	2P+PE
Earth 'clock' position	4 h
Voltage	100 up to 130V

Product description	
Frequency	50 and 60Hz
Protection degree	IP44
Colour code	yellow
Connection design	screwless spring terminals as cage clamp with Kontext-contact
Maximum conductor size	4,0 qmm
Dimension of enclosure	170x90 mm (HxW)
Material of enclosure	plastic
Contacts	the contacts are brass nickel plated

Logistics data	
Weight/pcs	0.57 kg / piece
Packaging	carton
Content amount	1 ST
EAN	4024941161657
Length	205 mm
Width	102 mm
Height	134 mm
Weight	0.63 kg
Volume	2,118.48 ccm

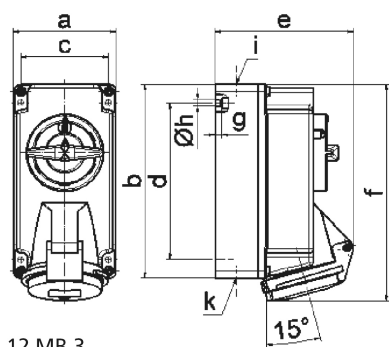

Ampere	16	16	16			
Polzahl	3	4	5			
a	90,0	90,0	90,0			
b	170,0	170,0	170,0			
c	77,0	77,0	77,0			
d	137,5	137,5	137,5			
e	108,0	114,0	121,0			
f	188,5	188,5	190,0			
g	6,0	6,0	6,0			
h ø	5,5	5,5	5,5			
i	M20	M20	M20			
k	M20/25	M20/25	M20/25			