


Product datasheet

Specifications

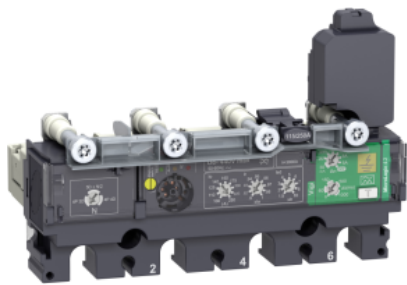

trip unit MicroLogic 4.2 for ComPacT
NSX 250 circuit breakers, electronic,
rating 250A, 4 poles 4d

C2544V250

EAN Code : 3606481993878

Main

Range	ComPacT new generation
Range of product	ComPacT NSX100...250 new generation
Product or component type	Trip unit
Trip unit name	MicroLogic 4.2
Trip unit technology	Electronic
Range compatibility	ComPacT new generation NSX160 ComPacT new generation NSX250
Device application	Distribution
Poles description	4P
Protected poles description	3D + N/2 4D 3D
Neutral position	Left
Trip unit protection functions	LSolR
Protection type	L : for overload protection (long time) So : for short time short-circuit protection with fixed delay I : for instantaneous short-circuit protection R : for earth-leakage protection
Trip unit rating	250 A at 40 °C
[Ue] rated operational voltage	440 V AC 50/60 Hz
Network type	AC
Network frequency	50/60 Hz
Circuit breaker mounting mode	Fixed

Complementary

Long-time pick-up adjustment type Ir (thermal protection)	Adjustable 9 settings
[Ir] long-time protection pick-up adjustment range	100...250 A
Long-time protection delay adjustment type tr	Fixed
[Tr] long-time protection delay adjustment range	11 s at 7.2 x Ir 16 s at 6 x Ir 400 s at 1.5 x Ir
Neutral protection settings	0.5 x Ir (3D + N/2) 1 x Ir (4D)

	No protection (3D)
Thermal memory	20 minutes before and after tripping
Short-time protection pick-up adjustment type Isd	Adjustable
[Isd] Short-time protection pick-up adjustment range	1.5...10 x Ir
Short-time protection delay adjustment type tsd	Fixed
Instantaneous protection pick-up adjustment type li	Fixed
[li] instantaneous protection pick-up adjustment range	3000 A
Earth-leakage protection	Integrated
Earth-leakage protection class	Class A
Earth-leakage protection sensivity adjustment type IΔn	Adjustable
[IΔn] earth-leakage protection sensitivity adjustment range	0.03 A 0.1 A 0.3 A 0.5 A 1 A 3 A 5 A
Earth-leakage protection specific mode	OFF using the IΔn rotary switch
Earth-leakage protection time delay adjustement type Δt	Adjustable
[Δt] Earth-leakage protection time delay adjustment range	0 ms 60 ms 150 ms 500 ms 1 s
Zone selective interlocking ZSI	Without
Local signalling	Flashing LED (green) for ready to operate LED 105 % Ir (red) for overload LED 90 % Ir (orange) for overload Color indicator (yellow) for residual current

Environment

Standards	EN/IEC 60947-2
Electrical shock protection class	Class II
Pollution degree	3 conforming to IEC 60947-1
IP degree of protection	IP40 conforming to IEC 60529
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-40...85 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.5 cm
Package 1 Width	11.0 cm
Package 1 Length	15.0 cm
Package 1 Weight	774.0 g

Unit Type of Package 2	S03
Number of Units in Package 2	10
Package 2 Height	30.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	8.14 kg
Unit Type of Package 3	P06
Number of Units in Package 3	80
Package 3 Height	75.0 cm
Package 3 Width	60.0 cm
Package 3 Length	80.0 cm
Package 3 Weight	72.0 kg

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
RoHS exemption information	Yes

Contractual warranty

Warranty	18 months
----------	-----------

Recommended replacement(s)