


Cane LED

Exterior Wall Lighting

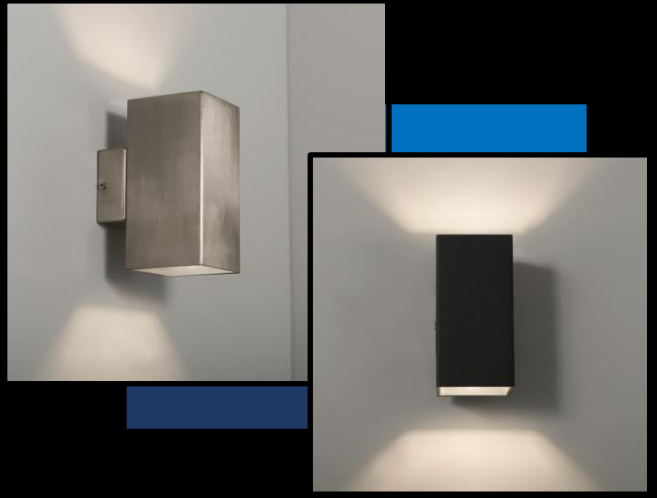

Data Sheet

Product Information

The Cane LED wall light is perfect for up/down lighting external walls. Made of 304 grade stainless steel it is perfect for most areas.

Comes with a 2 year warranty for your peace of mind.

Product Features

- 2 year warranty
- Class I
- IP44
- Instant on
- 2x 5W 4000K LED
- 2x 444 Lumen output
- CRI: Ra84
- Integrated driver
- Not suitable for high saline areas
- L70 – 25,000hrs



KSR1360

Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class	Protection Class
KSR1360	Cane 2x 5W LED Square Up & Down Wall Light Stainless Steel	10	4000	2x 444	84	A+	I
KSR1361	Cane 2x 5W LED Square Up & Down Wall Light Anthracite	10	4000	2x 444	84	A+	I

Nominal voltage	220~240VAC
Operating frequency	50/60Hz
Circuit Wattage	10.1w including driver losses
Circuit Current	0.047
Driver mA Rating	N/A
PFC	0.9
In Rush Current	N/A
Ambient temperature range	-20°C to +40°C

Construction

Body: 304 Stainless Steel
Diffuser: Polycarbonate


Standards

BSEN60598-1:2021 Luminaires – Part 1: General requirements and tests

In Conformity with

LVD Low voltage directive 2014/35/EU
EMC Electromagnetic compatibility directive 2014/30/EU
ERP Energy related products directive 2019/2020/EU
RoHS Restriction of hazardous substances 2015/863/EU

Product Dimensions

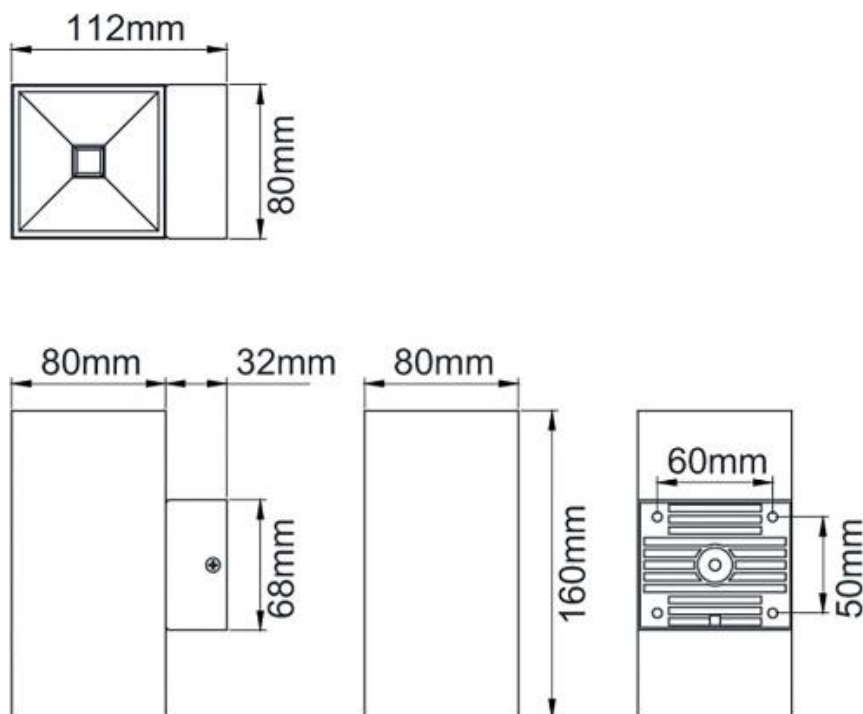

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.