

WIRING DEVICES TECHNICAL

EDGE™

mkelectric.com



2 Gang Switchsocket Outlet with Integrated Dual USB Ports - Type A + C

Standards and approvals

Complies with BS 1363-2:2016+A1:2018.

Products are CE marked and meet the requirements of the Low Voltage, EMC, RoHS and WEEE directives.



TECHNICAL SPECIFICATION

ELECTRICAL

INPUT VOLTAGE AND FREQUENCY

220-240V a.c. 50/60Hz

OUTPUT VOLTAGE

5V d.c.

OUTPUT CURRENT

3.0A

OUTPUT POWER

15.0W

AVERAGE ACTIVE EFFICIENCY

84%

LOW LOAD EFFICIENCY

76.5%

NO LOAD POWER CONSUMPTION

0.05W

CURRENT RATING

13A

Combined total 3A drawn from USB outlets

TERMINAL CAPACITY

Live, neutral & earth

3 x 2.5mm², 3 x 4mm², 2 x 6mm² (stranded)

PHYSICAL

AMBIENT OPERATING TEMPERATURE

0°C to +40°C

IP RATING

IP2XD

MAX. INSTALLATION ALTITUDE

2000 metres


Description

These products offer end users easy access to power for charging a variety of devices such as smart phones, tablets and cameras. They also offer benefits of the advantageous design features of Edge including - safety and quick install.

FEATURES

- Can charge Type A and C devices at up to 2A and 3A respectively
- USB outlets are designed to provide optimum charging compatibility across a wide range of devices
- Differing manufacturers devices can be charged simultaneously via the two USB outlets
- If two devices are connected to USB outlets the total rated current of 3A is divided between the two outlets
- If the total charging current exceeds the rated level of 3A then the device will enter a current limiting safety mode
- Electronically protected against an overload or short circuit on either USB outlet
- 3 pin operated safety shutter on 13A socket outlets
- Dual earthed for added user safety
- Backed out and captive terminal screws
- Top access, angled terminals make wiring easier and quicker
- 3mm minimum switch contact gap
- Double pole switching
- Additional electrical safety from neutral 'make first', 'break last' feature
- Printed terminal markings on dark rear mouldings for clearer identification
- Switch contacts with silver contacts on both surfaces for good continuity
- Matching metal rocker switches

Dimensions (mm)

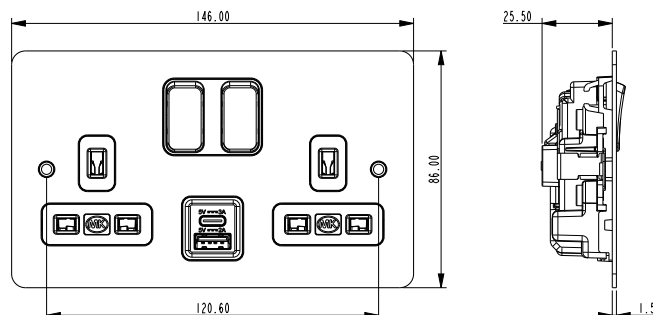

Installation

Do not mount or use as a trailing socket or where they may be subject to excessive moisture or damp.

BOX TYPES WITHOUT PATRESS

| GANG | FLUSH |
|------|----------------------|
| 2 | DEPTH 35MM 886ZIC |

Note: When carrying out insulation resistance testing, first DISCONNECT the product. Failing to do this could damage the product and will also give spurious insulation readings.