



COLLINGWOOD
LIGHTING



FEATURES & BENEFITS

- › Plug & Play connector for quick installation
- › Small & discreet
- › Ideal for decorative lighting



LED LYTE

Mini LED downlight

- IP30** Ideal for use indoors
- 7-year extended warranty** available

- 110°
- 1W
- Ø26
- 39°C
- 35°C
- 20g
- 70,000h
- L70, B10
- 3SDCM

PHOTOMETRICS @ 25°C

Colour	Beam angle	Product code	CRI	lm	lm/W	lx at 1m
4000K	110°	LED LYTE NW	>70Ra	82	82	46
3000K	110°	LED LYTE WW	>80Ra	60	60	30
2700K NEW	110°	LED LYTE 27*	>80Ra	58	58	29
Amber	110°	LED LYTE AMBER	-	-	-	-
Blue	110°	LED LYTE BLUE	-	-	-	-
Red	110°	LED LYTE RED	-	-	-	-

*Available on request, please call our team for lead times and MOQ on 01604 495 151

GENERAL

Construction material: Plastic

WIRING

Cable / flying lead: 1m (0.205mm² red & black PTFE)

Type of wiring required: Series (Plug & Play)

NB: Removal of plugs will render this product non-returnable

LED DRIVERS


Bathroom zone applicable to fitting only

Product code	mA	SELV	Dimming	Bathroom zone	Min	Max
PLU/PP/350 1-9 (Plug & Play)	350	Yes	No	-	1	9
PLR/350 1-5	350	Yes	No	-	1	5
PLD UNI-DRIVE 350MA	350	Yes	Yes (1-10V)	-	1	10

For LED driver bathroom zone & additional LED drivers see page 290-295


ACCESSORIES

Product code	Description	
LED LYTE 1M EXT	1m Plug & Play extension lead	231
LED LYTE 6 WAY EXT	6-way 1m Plug & Play extension lead	231
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types	296

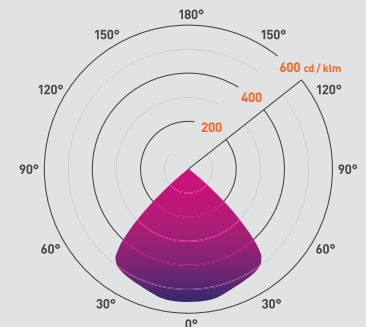

4000K 110°

Additional diagrams available at collingwoodlighting.com



This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Energy efficiency class: A++ (LED)

874/2012