


## 6242B

LSOH® Flat Wiring Cable with Bare CPC. BS 7211. 300/500 V

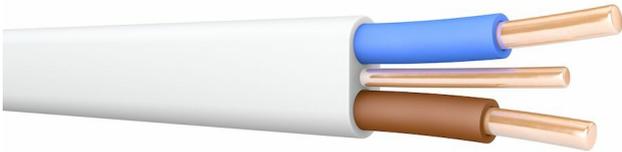

Prysmian 6242B is a flat twin core Low Smoke, Zero Halogen (LSOH®) cable designed for installation as clipped direct, on tray or in basket and also buried within plaster or embedded in walls

Two cores with bare CPC

### KEY APPLICATIONS

Suitable for fixed installation in dry or damp premises on walls, boards or trays, in channels or embedded in plaster particularly for situations in which low emission smoke and acid gas is required.

### FEATURES AND BENEFITS

- Low Smoke, Zero Halogen (LSOH®)
- Manufactured under ISO 9001 Quality management systems

### STANDARDS



**BS 7211**

**BS EN 60332-1-2**

**BS EN 61034-2**

**BS EN 60754-1**

Construction Standard

Flame Propagation - Single Cable

Smoke emission

Corrosive and acid gas

### CONSTRUCTION

Conductor material

Copper

Conductor surface

Bare

Core insulation material

XLPE

Material outer sheath

Low smoke zero halogen

Cable shape

Flat

---

## APPLICATIONS PROPERTIES

Nominal voltage U <sub>0</sub> [V]	300
Nominal voltage U [V]	500
Flame retardant	In accordance with BS EN 60332-1-2
Halogen free	Yes
Low smoke	Yes
Max. conductor temperature [°C]	90
Min. Operation temperature [°C]	-25
UV resistant	Yes
Min. Installation temperature [°C]	0
Max. Installation temperature [°C]	80
Bending radius (rule)	4D (Minor axis)

---

## COLOURS

Insulation:

Brown, Blue

Alternatively, Brown, Brown (for 2x1.0 and 2x1.5 only)

Sheath:

White

---

## CURRENT RATINGS

Refer to table 4E2 of BS 7671 Requirements for Electrical Installations. IET Wiring Regulations

Note: Where a conductor operates at a temperature exceeding 70°C it shall be ascertained that the equipment connected to the conductor is suitable for the conductor operating temperature

---

## CONTACT INFORMATION

Prysmian Cables & Systems Limited, Chickenhall Lane, Eastleigh, Hampshire, SO50 6YU, United Kingdom

[uk.prysmiangroup.com](http://uk.prysmiangroup.com)

Copyright Prysmian Group - 2021

You may not copy, reprint or reproduce in any form the content, either wholly or in part, of this Datasheet, without the written permission of the copyright owner.

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group : any modification or alteration afterwards of product may give different result. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend the information within this Datasheet without prior notice. This Datasheet may include inaccuracies, omissions of content and of information and is not contractually valid unless specifically authorised by Prysmian Group.

## TECHNICAL DATA

Number of cores	Nominal cross section conductor [mm <sup>2</sup> ]	Conductor category	Nominal cross section of protective conductor [mm <sup>2</sup> ]	Cable height approx. [mm]	Cable width approx. [mm]	Cable weight [kg/km]	Conductor resistance at 20° C [Ohm/km]
2	1.5	Class 1 = solid	1	4.7	8.6	73	12.1
2	2.5	Class 1 = solid	1.5	5.3	9.9	110	7.41
2	4	Class 2 = stranded	1.5	6.1	11.4	145	4.61
2	6	Class 2 = stranded	2.5	6.8	13.1	205	3.08
2	10	Class 2 = stranded	4	8.4	16.8	310	1.83
2	16	Class 2 = stranded	6	9.6	19.5	465	1.15