

carabiner wires



SWXXXCAR

Selection charts **p. 10-15**
Technical information **p. 33**
Wire specifications **p. 18**

Key free release mechanism
5 x 50 on type 1 and 2 wire and 6 x 60 on type 3 wire
BZP carabiner hook
Eyelet prevents accidental un-hooking of carabiner from wire
Suspension can be inverted
High tensile galvanised wire 1960 N/mm² grade 7 x 7 construction
Wires conform to BS EN 12385




SW2EYEXXXCAR

Pack	Cat. Nos.	Carabiner wires	
		Suitable for installing : • Steel wire cable tray • Cable tray • Lighting • Signage • Purlin hangers • Trunking • Busbar	
		Wires supplied with corresponding mechanisms	
		Carabiner wires - Type 1	
		Length (m)	Safe working load (kg)
10	SW11CAR	1	10
10	SW12CAR	2	10
10	SW13CAR	3	10
10	SW14CAR	4	10
10	SW15CAR	5	10
10	SW110CAR	10	10
		Carabiner wires - Type 2	
		Length (m)	Safe working load (kg)
10	SW21CAR	1	45
10	SW22CAR	2	45
10	SW23CAR	3	45
10	SW24CAR	4	45
10	SW25CAR	5	45
10	SW210CAR	10	45
		Carabiner wires - Type 3	
		Length (m)	Safe working load (kg)
10	SW31CAR	1	90
10	SW32CAR	2	90
10	SW33CAR	3	90
10	SW34CAR	4	90
5	SW35CAR	5	90
5	SW310CAR	10	90

Pack	Cat. Nos.	Eye carabiner wires	
		Suitable for installing : • Steel wire cable tray • Cable tray • Busbar¹ • Lighting • Lighting track¹ • Trunking¹	
		Use in conjunction with other Swiftwire products to connect to ceiling : • Mechanism and wire • Concrete anchors • Threaded anchors • Looped systems • Other ceiling mountings	
		Eye carabiner wires - Type 2	
		Span (mm)	Safe working load (kg)
10	SW2EYE200CAR	50-200	50
10	SW2EYE400CAR	300-400	50

1 : For use with channel to create trapeze

Tools and accessories
p. 40

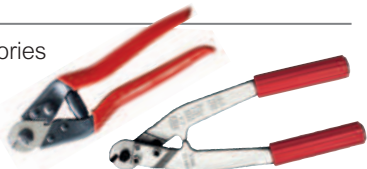

For carabiner Y-span wires
p. 34

