

FIRE RATED LED REGRESSED COLOUR CHANGE COMPACT DOWNLIGHT

SUPPLIED WITH MATT WHITE BEZEL

Product Features

- **3-step colour changing**
Using standard light switch – 3000K, 4000K, 6500K
- **Super efficient Samsung LED chips**
Latest technology, maximum reliability
- **Clip&Fit**
Cable clamp housing for quick and easy installation
- **Speedfit**
Loop-In/Loop-Out push fit terminals

6W LED	IP65 Rating	25K Hours	67mm Cutout	3000-6500K WARM-COOL WHITE
I-JOIST COMPLIANT	30,60,90 MINS Fire Rated	Air Leakage Part C	Acoustic Part E	5 YEAR Warranty

CAT NO.	LUMINAIRE LUMENS	WATTAGE	COLOUR TEMP
EFCB60WCC	3000K-470lm 4000K-550lm 6500K-490lm	6W	3000K 4000K 6500K


Product Accessories

CAT NO.	BEZEL COLOUR	BEZEL DESIGN
EFCBBZPC	Polished Chrome	Regressed
EFCBBZBS	Brushed Steel	Regressed
EFCBBZBN	Black Nickel	Regressed


CAT NO.	WEIGHT (g)	EFFICACY (Lm/W)	CRI	BEAM ANGLE	FREQUENCY (V/Hz)	POWER FACTOR	AMBIENT TEMP RATED LIFE (°C)	L/B RATED LIFE
EFCB60WCC	235	91.6	>83	60°	220-240/50-60	>0.9	25°	L70/B50



Product Drawing

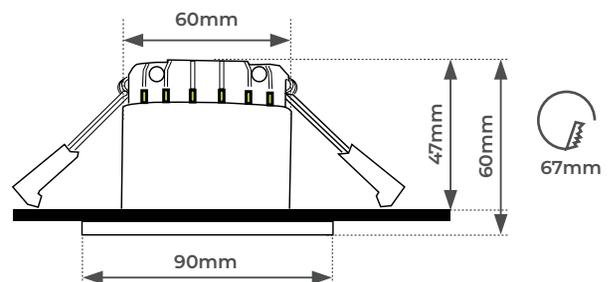

Bezels

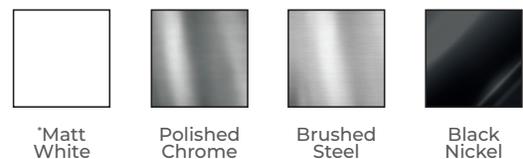

*Supplied with Matt White

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-2	Luminaires – Recessed
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 61000-3-3	Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment



LUCECO

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

874/2012