



MASTER Value GLASS LED bulbs

MASVLE LEDBulbD5.9-60W B22A60 927FR G UK

Featuring a classic heritage design, classic filament LED lamps combine the familiar shapes of incandescent bulbs with the benefits of the long-lasting LED technology. The product offers more energy saving compared with normal LED bulbs, and also provides the customer with a good light experience and superior dimming performance. MASTER Value Glass Led Bulbs deliver significant energy savings, offering 30% more compared to normal LEDs. They provide excellent quality of light. By offering a lifetime of 15,000 hours, they reduce maintenance costs.

Product data

General Information	
Cap base	B22 [B22]
EU RoHS compliant	Yes
Nominal lifetime (nom.)	15000 h
Switching cycle	20,000X
Light Technical	
Colour Code	922-927 [CCT of 2,200 K-2,700 K]
Luminous flux (nom.)	806 lm
Colour designation	Warm Glow (WG)
Correlated Colour Temperature (Nom)	2200 2700 K
Luminous efficacy (rated) (nom.)	136.00 lm/W
Colour consistency	<6
Colour rendering index (nom.)	90
LLMF at end of nominal lifetime (nom.) 70 %	
Operating and Electrical	
Input frequency	50 to 60 Hz

Power (Rated) (Nom)	5.9 W
Lamp current (nom.)	40 mA
Wattage equivalent	60 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light (nom.)	0.5 s
Power factor (nom.)	0.6
Voltage (Nom)	220-240 V
Temperature	
T-Case maximum (nom.)	70 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Lamp Finish	Frosted
Bulb shape	A60 [A 60mm]


Datasheet, 2021, October 14 data subject to change

MASTER Value GLASS LED bulbs

Approval and Application	
Energy Efficiency Class	D
Energy consumption kWh/1,000 hours	6 kWh
Product Data	
Full product code	871951432479401
Order product name	MASVLE LEDBulbD5.9-60W B22A60 927FR G
	UK

EAN/UPC – product	8719514324794
Order code	32479401
SAP numerator – quantity per pack	1
Numerator – packs per outer box	10
SAP material	929003010699
SAP net weight (piece)	0.030 kg


Dimensional drawing




Bulb A60 EU 6-60W 810lm WG B22 FR

Product D C MASVLE LEDBulbD5.9-60W B22A60 927FR G UK 60 mm 103 mm


Photometric data

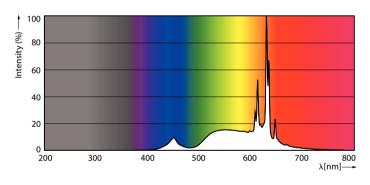

LEDbulb MAS SLR 5,9W A60 E27 927 CL-POC



LEDbulb MAS SLR A60 5,9W E27 927 FR-LDD





Calculus Photomerica 4.5 Philips Lighting B.V. Rage: UT

LEDbulb MAS SLR 5,9W A60 B22 927 FR-GUL

MASTER Value GLASS LED bulbs

Lifetime

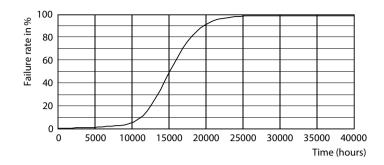



15K LED 15K LMP



© 2021 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.