

MASTER Value GLASS LED candles and lustres

MASTER VLE LEDCandleDT3.4-40W B22 927B35CLG

Featuring a classic heritage design, Classic filament LED Lamps combine the familiar shapes of incandescent candles and lustres with the benefits of the long-lasting LED technology. The product offers more energy saving compared with normal LED candles and lustres, and also provides the customer with a good light experience and superior dimming performance. MASTER Value Glass Led candles and lustres deliver significant energy savings, offering 30% more compared to normal LEDs. They provide excellent quality of light. By offering a lifetime of 15,000 hours, they reduce maintenance costs.

Product data


General Information		Colour consistency	
Cap base	B22 [B22]	Colour rendering index (nom.)	90
EU RoHS compliant	Yes	LLMF at end of nominal lifetime (nom.)	70 %
Nominal lifetime (nom.)	15000 h	Operating and Electrical	
Switching cycle	20,000X	Input frequency	50 to 60 Hz
	Sphere	Power (Rated) (Nom)	3.4 W
Light Technical		Lamp current (nom.)	24 mA
Colour Code	922-927 [CCT of 2,200 K-2,700 K]	Wattage equivalent	40 W
Luminous flux (nom.)	470 lm	Starting time (nom.)	0.5 s
Colour designation	Warm Glow (WG)	Warm-up time to 60% light (nom.)	0.5 s
Correlated Colour Temperature (Nom)	2200 2700 K	Power factor (nom.)	0.6
Luminous efficacy (rated) (nom.)	138.00 lm/W		

MASTER Value GLASS LED candles and lustres

Voltage (Nom)	220-240 V
Temperature	
T-Case maximum (nom.)	70 °C
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Lamp Finish	Clear
Bulb shape	B35 [B 35mm]
Approval and Application	
Energy Efficiency Class	D
Energy consumption kWh/1,000 hours	4 kWh

	453267
Product Data	
Full product code	871951432515900
Order product name	MASTER VLE LEDCandleDT3.4-40W B22 927B35CLG
EAN/UPC – product	8719514325159
Order code	32515900
SAP numerator – quantity per pack	1
Numerator – packs per outer box	10
SAP material	929003012402
SAP net weight (piece)	0.014 kg


Dimensional drawing




Candle B35 EU 3.5-40W 475lm WG B22 CL

Product	D	C
MASTER VLE LEDCandleDT3.4-40W B22 927B35CLG	35 mm	94 mm

Photometric data




LEDcandle MAS SLR B35 3,4W E14 927 CL-LDD



LEDcandle MAS SLR 3,4W B35 B22 927 CL-GUL


MASTER Value GLASS LED candles and lustres

Photometric data

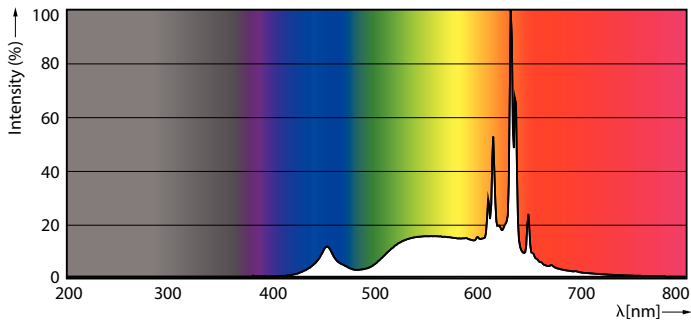


LEDcandle MAS SLR 3,4W B35 E14 927 CL-POC

Lifetime

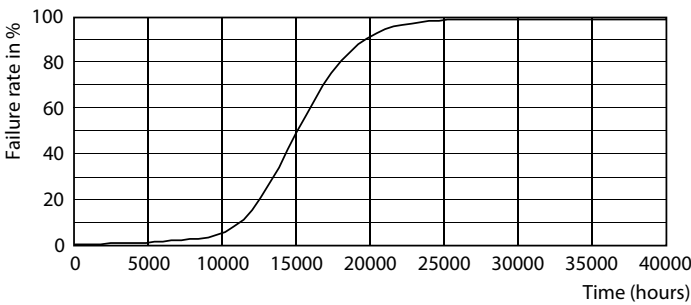

15K LED

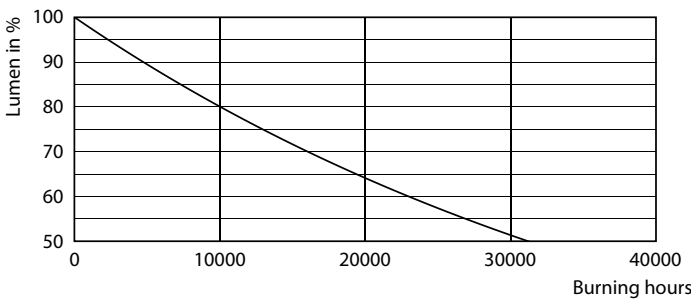

15K LMP

