


# Product datasheet

Specifications

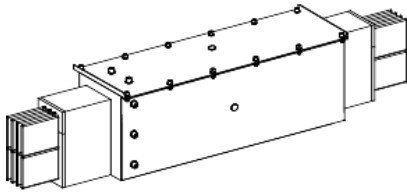

## CANALIS KR 5X1250AL EXPANSION UNIT DB

KRA1250DB5

### Main

Range	Canalis
Product name	KR
Product or component type	Expansion unit
Busbar description	Flexible bar
Device short name	KRA
Product specific application	Oil and gas Real estate and office buildings Healthcare Water and waste water Mining minerals and metals Enterprise data centres
Device application	Feeder length
Material	Aluminium
[Ie] rated operational current	1250 A at 35 °C
Polarity	3L + N + PE
Length	1000 mm

### Complementary

Housing material	Mineral epoxy resin
Contacts material	Tinned aluminium
[Ue] rated operational voltage	1000 V
Network frequency	50/60 Hz
[Ui] rated insulation voltage	1000 V
[Icw] rated short-time withstand current	53 kA
[Ipk] rated peak withstand current	117 kA
Radiated magnetic field	14.68 mT
Thermal stress limit	2809 A².s
Maximum voltage drop	<0.0102 V with power factor = 1 at 50 Hz with 1A for 100 m long <0.013 V with power factor = 0.9 at 50 Hz with 1A for 100 m long <0.0134 V with power factor = 0.8 at 50 Hz with 1A for 100 m long <0.0133 V with power factor = 0.7 at 50 Hz with 1A for 100 m long
Mounting location	Indoor Outdoor

Installation direction	Vertical Horizontal
Earth conductor	Standard earth
Product certifications	ATEX CE EAC
Standards	IEC 61439-6
Dimension type	Fix
Width	314 mm on 570 mm length
Height	155 mm on 570 mm length
Colour	Grey (RAL 7030)
Linear load	40 kg/m

## Environment

IP degree of protection	IP68 conforming to IEC 60529
IK degree of protection	IK10 conforming to IEC 62262
Pollution degree	3
Fire resistance	760 °C 180 min conforming to IEC 60331-1
Derating factor	0...35 °C (100 % of In) 35...40 °C (96 % of In) 40...45 °C (89 % of In) 45...50 °C (84 % of In) 50...55 °C (78 % of In)
Operating altitude	1000 m 100 % of In (indoor) 2000 m 99 % of In (indoor) 3000 m 96 % of In (indoor) 4000 m 90 % of In (indoor) 1000 m 98 % of In (outdoor) 2000 m 94 % of In (outdoor) 3000 m 89 % of In (outdoor) 4000 m 83 % of In (outdoor)
Environmental characteristic	EMC directive conforming to IEC 61439-6

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	42 kg
Package 1 Height	13 cm
Package 1 width	12 cm
Package 1 Length	100 cm
Unit Type of Package 2	CAR
Number of Units in Package 2	1
Package 2 Weight	42 kg
Package 2 Height	400 cm
Package 2 width	13 cm
Package 2 Length	12 cm

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes

EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Halogen content performance	Halogen free product

Contractual warranty

Warranty	18 months
----------	-----------