




Product Code: CMA652AG

Description: 13A Double Pole Switched Fused Connection Unit With Neon

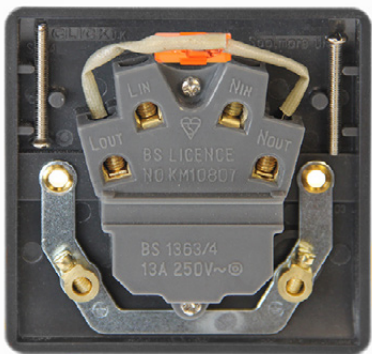

General Information

Plate Dimensions (mm)	86 (W) x 86 (H) x 9.5 (D)	
Plate Fixing Centres - Horizontal (mm)	60.3	
Style	Rounded Profile	
Finish	Anthracite Grey	
Switch Finish	Polar White	
Materials	Front Plate, Rocker Switch & Fuse Drawer: Urea Neon Lens: Polycarbonate Terminal Screws: Steel & Yellow Passivated Internal Busbars: Formed Pressed Brass	Rear Housing: Urea Terminals: Brass Contacts: Silver "on-lay" Copper / Brass Earth Strap: Mild Steel
Anti Microbial Certified	Yes	
Rated Voltage (V~) (Ue)	250	Frequency (Hz) 50
Resistive Load Rating (A)	13	
Fuse Fitted Rating & Type	13A (BS 1362)	
Termination Type	Screw	
Terminal Size (mm)	Ø5	Terminal Torque Value (Nm) 2
Terminal Capacity - Solid (mm²)	3 x 2.5 or 2 x 4	
Switched	Yes	
Double Pole Switch	Yes	
Twin Earth Terminals	Yes	
Neon Indicator	Yes	
Indicator Colour	Orange	
Product Marking	Fused	
Minimum Back Box Depth (mm)	25	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	20	
Standards	BS 1363-4: 2016 +A1: 2018 BS 1362: 1973 +A3: 2021	

Additional Information	Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white & grey moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases as well as anti-viral properties against enveloped and non-enveloped viruses. All products have been independently tested with 99.9% of enveloped viruses and 92% of non-enveloped viruses killed off whilst achieving a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.
------------------------	---