




LOW ENERGY LOUVRED BOLLARD 1100MM

- Requires 1 x 20W ES triple turn CFLi (included). Fitting is rated at 20W max
- This luminaire is compatible with bulbs of the energy classes: A+ to E and is sold with a bulb of the energy class: A
- Aluminium construction
- Root or flange fixing: versatile installation options
- Louvred diffuser: discreet lighting effect
- Supplied complete with low energy light source


• M.O.M: 1 / O.P.Q: 1

Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Energy Rating
B1100BK	Black	20W	3500K	1250 lm	8,000 hrs	IP44	A



Eterna
Everyday Lighting For Professionals

LAMP SPECIFICATIONS:	
Nominal useful luminous flux	1250 lm
Rated Wattage	20W
Rated luminous flux	1250 lm
Nominal life time of the lamp	8,000 hrs
Colour temperature	3500K
Number of switching cycles before premature lamp failure	8,000
Warm-up time up to 60 % of the full light output	<10s
Dimmable	No
Lamp dimensions mm	164 x 48mm
Nominal beam angle	>120°
Rated power	20W
Rated lamp lifetime	8,000
Lamp power factor	≥0.55s
Lumen maintenance factor at end of nominal life	80%
Starting time	0.2s
Colour rendering	84%
Rated beam angle	>120°
Cap Type	E27
Mercury Content	≤2.5mg

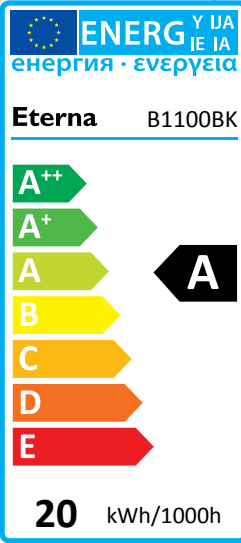

Eterna B1100BK



This luminaire is compatible with bulbs of the energy classes:



This luminaire is sold with a bulb of the energy class: **A**

874/2012

