


# Product Environmental Profile

SP5000, Open Box, DC

Pro-face FP



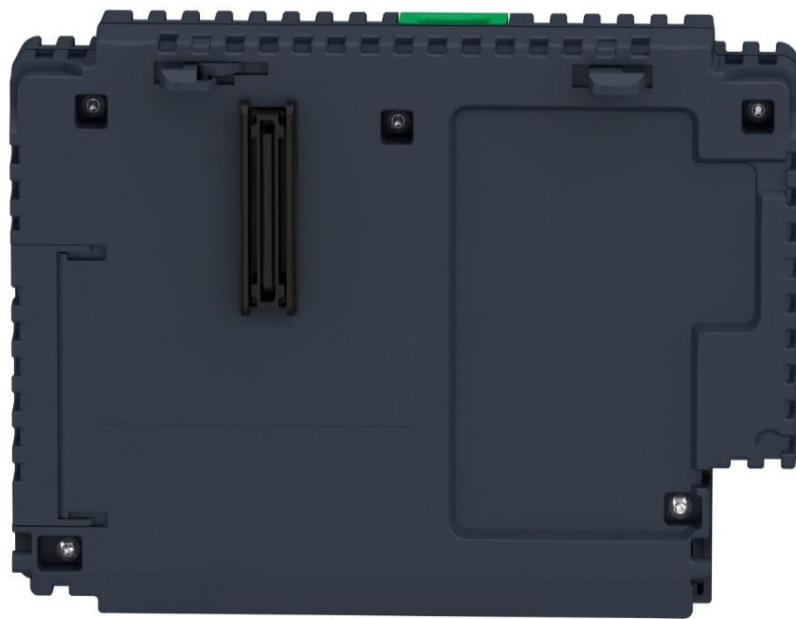


## General information

Reference product	SP5000, Open Box, DC - PFXSP5B40
Description of the product	The main purpose of the SP5B series is to make available Graphic Operator Interface.
Description of the range	The products of the range are: Pro-face FP The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.
Functional unit	To provide Base unit during 10 years and maximum use rate at 35W, based on below function: <ul style="list-style-type: none"> <li>- USB2.0 port with 3 USB type A</li> <li>- USB2.0 port mini B USB</li> <li>- Serial communication interface (RS-422/485, RS-232C)</li> <li>- Ethernet interface</li> </ul> In accordance with the relevant standards: <ul style="list-style-type: none"> <li>- UL 508</li> <li>- ANSI/ISA 12-12-01</li> <li>- Class I division 2 CSA C22.2 No 213</li> <li>- CSA C22.2 No 142</li> <li>- IEC 61132-2</li> </ul>



## Constituent materials

Reference product mass	1080 g including the product, its packaging and additional elements and accessories
------------------------	---

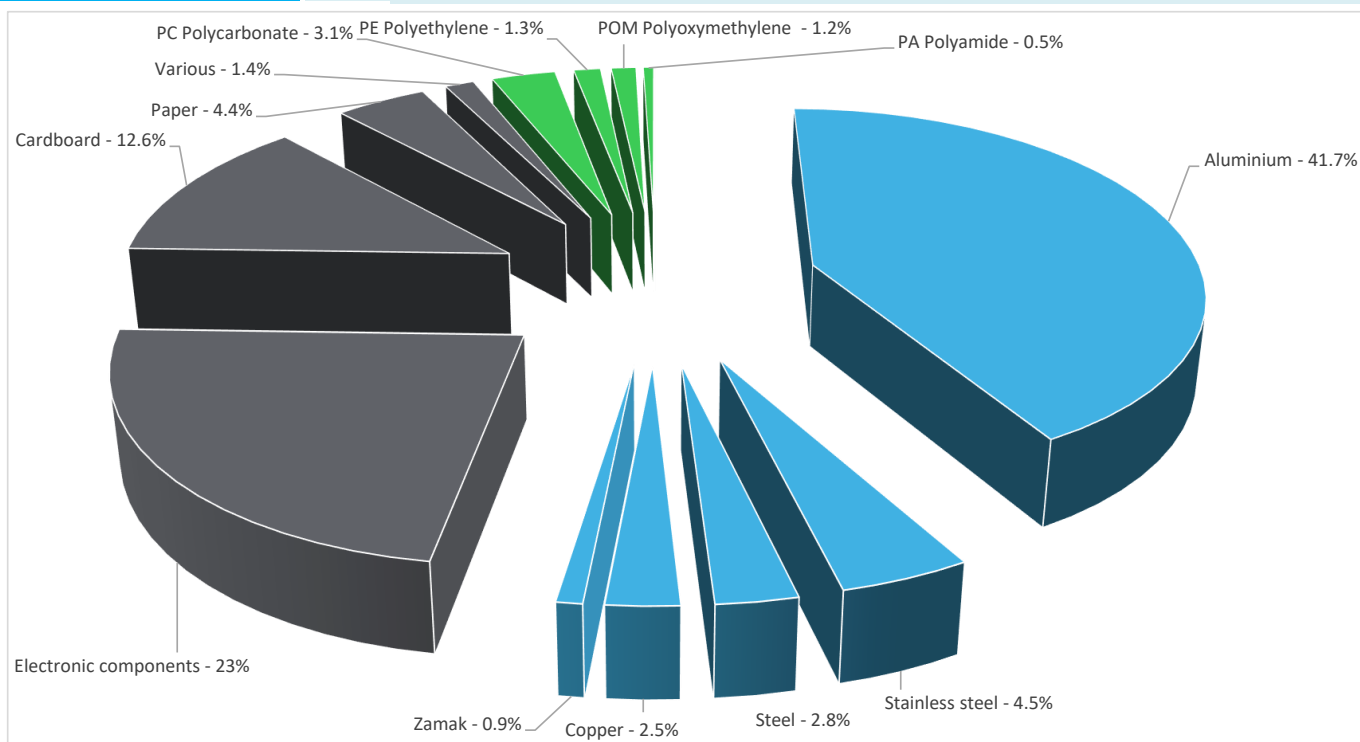

Plastics	6.10%
Metals	52.40%
Others	41.40%

## Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<https://www.se.com/ww/en/work/support/green-premium/>

## Additional environmental information

<b>End Of Life</b>	Recyclability potential:	<b>62%</b>	The recyclability rate was calculated from the recycling rates of each material making up the product with the exception of data using the ESR database. For materials or components using the ESR database or the absence of data the conservative hypothesis "0% recyclability" was used.
--------------------	--------------------------	------------	---

## Environmental impacts

<b>Reference service life time</b>	10 years			
<b>Product category</b>	Other equipments - Active product			
<b>Installation elements</b>	The product does not require any installation operations.			
<b>Use scenario</b>	The product is in active mode 100% of the time with a power use of 35W, for 10 years.			
<b>Time representativeness</b>	The collected data are representative of the year 2023			
<b>Technological representativeness</b>	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and representative of the actual type of technologies used to make the product.			
<b>Geographical representativeness</b>	Rest of the World			
<b>Energy model used</b>	<b>[A1 - A3]</b>	<b>[A5]</b>	<b>[B6]</b>	<b>[C1 - C4]</b>
	Electricity Mix; 2018; Indonesia, ID	Electricity Mix; Low voltage; 2018; France, FR Electricity Mix; Low voltage; 2018; United States, US Electricity Mix; Low voltage; 2018; Asia Pacific, APAC	Electricity Mix; Low voltage; 2018; France, FR Electricity Mix; Low voltage; 2018; United States, US Electricity Mix; Low voltage; 2018; Asia Pacific, APAC	Electricity Mix; Low voltage; 2018; France, FR Electricity Mix; Low voltage; 2018; United States, US Electricity Mix; Low voltage; 2018; Asia Pacific, APAC

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators		SP5000, Open Box, DC - PFXSP5B40						
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to climate change	kg CO2 eq	1.68E+03	2.51E+02	1.57E+00	0*	1.41E+03	9.19E+00	-2.67E+00
Contribution to climate change-fossil	kg CO2 eq	1.68E+03	2.51E+02	1.57E+00	0*	1.41E+03	9.19E+00	-2.66E+00
Contribution to climate change-biogenic	kg CO2 eq	1.42E+00	3.48E-01	0*	0*	1.07E+00	1.57E-04	-8.48E-03
Contribution to climate change-land use and land use change	kg CO2 eq	4.61E-05	4.59E-05	0*	0*	0*	1.52E-07	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	4.05E-05	3.31E-05	0*	0*	7.44E-06	7.41E-09	-7.94E-07
Contribution to acidification	mol H+ eq	1.04E+01	1.59E+00	1.01E-02	0*	8.78E+00	1.08E-02	-1.47E-02
Contribution to eutrophication, freshwater	kg (PO4) <sup>3-</sup> eq	4.87E-03	4.39E-04	5.84E-07	0*	4.38E-03	4.81E-05	-8.10E-06
Contribution to eutrophication marine	kg N eq	1.18E+00	1.70E-01	4.74E-03	0*	9.98E-01	3.79E-03	-1.47E-03
Contribution to eutrophication, terrestrial	mol N eq	1.36E+01	1.80E+00	5.21E-02	0*	1.17E+01	3.90E-02	-1.65E-02
Contribution to photochemical ozone formation - human health	kg COVNM eq	3.92E+00	5.96E-01	1.34E-02	0*	3.30E+00	1.08E-02	-6.28E-03
Contribution to resource use, minerals and metals	kg Sb eq	4.64E-02	4.63E-02	0*	0*	6.79E-05	0*	-3.92E-04
Contribution to resource use, fossils	MJ	4.10E+04	2.81E+03	2.17E+01	0*	3.81E+04	1.24E+02	-3.76E+01
Contribution to water use	m3 eq	1.16E+02	5.78E+01	0*	1.67E-02	5.73E+01	8.14E-01	-1.15E+00

Inventory flows Indicators		SP5000, Open Box, DC - PFXSP5B40						
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	4.11E+03	1.10E+02	0*	0*	4.00E+03	0*	-3.04E-01
Contribution to use of renewable primary energy resources used as raw material	MJ	3.66E+00	3.66E+00	0*	0*	0*	0*	0.00E+00
Contribution to total use of renewable primary energy resources	MJ	4.11E+03	1.14E+02	0*	0*	4.00E+03	0*	-3.04E-01
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	4.10E+04	2.81E+03	2.17E+01	0*	3.81E+04	1.24E+02	-3.76E+01
Contribution to use of non renewable primary energy resources used as raw material	MJ	4.92E+00	4.92E+00	0*	0*	0*	0*	0.00E+00
Contribution to total use of non-renewable primary energy resources	MJ	4.10E+04	2.81E+03	2.17E+01	0*	3.81E+04	1.24E+02	-3.76E+01
Contribution to use of secondary material	kg	1.54E-05	1.54E-05	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	2.70E+00	1.35E+00	0*	3.88E-04	1.33E+00	1.90E-02	-2.67E-02
Contribution to hazardous waste disposed	kg	9.01E+02	8.66E+02	0*	0*	3.30E+01	1.97E+00	-2.87E+01
Contribution to non hazardous waste disposed	kg	2.84E+02	6.53E+01	5.47E-02	1.82E-01	2.18E+02	5.09E-01	-1.09E+00
Contribution to radioactive waste disposed	kg	6.12E-02	3.27E-02	3.89E-05	0*	2.85E-02	3.55E-05	-5.61E-04
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	6.66E-01	8.85E-02	0*	0*	0*	5.77E-01	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	6.27E-03	8.35E-04	0*	0*	0*	5.44E-03	0.00E+00

\* represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product kg de C 0.00E+00

Contribution to biogenic carbon content of the associated packaging kg de C 5.56E-02

Life cycle assessment performed with EIME version v6.2-6, database version 2023-02 in compliance with ISO 14044, EF 3.0 method is applied, for biogenic carbon storage, assessment methodology 0/0 is used

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP1401014_V3	Drafting rules	PCR-4-ed4-EN-2021 09 06
Date of issue	05-2024	Supplemented by	PSR-0005-ed3.1-EN-2023 12 08
		Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
		Validity period	5 years

Independent verification of the declaration and data, in compliance with ISO 14021 : 2016

Internal  External

The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)

PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022

The components of the present PEP may not be compared with components from any other program.

Document complies with ISO 14021:2016 "Environmental labels and declarations. Type II environmental declarations"

Schneider Electric Industries SAS

Country Customer Care Center

<http://www.se.com/contact>

35, rue Joseph Monier

CS 30323

F- 92500 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 928 298 512 €

[www.se.com](http://www.se.com)

Published by Schneider Electric