


Insaver HO Topper LED II 175

Insaver HO Topper LED II 175 RO 15W NW
3033937



Product features

- IP44 from the front round LED downlight with outputs of up to 2,289lm and an efficacy of up to 99lm/W. Polycarbonate diffuser with a white bezel. Shallow recess depth (<65mm). Available in 12, 15, 21 & 25W in 150mm, 175mm, 205mm & 225mm cut out sizes. Perfect for up to 2x26W CFL replacement. Includes loop-in loop-out facility for quick installation.

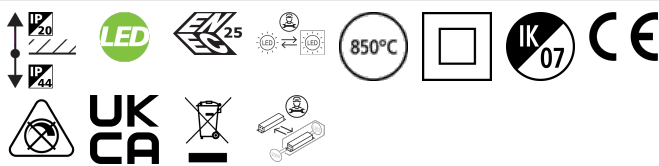

PRODUCT OVERVIEW

Product name	Insaver HO Topper LED II 175 RO 15W NW
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality
ETIM Class	EC001744
E-number SE	7465673
Warranty	5 years
Fixture luminous flux (lm)	1480
Luminaire efficacy (lm/W)	99
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	15
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	8711971339373
Dimming method	N/A

DATA TABLE

Insaver HO Topper LED II 175

Insaver HO Topper LED II 175 RO 15W NW
3033937

General data

Product name	Insaver HO Topper LED II 175 RO 15W NW
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality
Operating temperature range (°C)	-10°C - 25°C
Performance ambient temperature T _q (°C)	25
ETIM Class	EC001744
E-number SE	7465673
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1480
Luminaire efficacy (lm/W)	99
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Beam Angle (°)	74
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	15
Mains voltage (V)	220-240V
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class II
Control gear type	LED driver constant current
Transformer required	Yes
Dimmable	No
Drive current (mA)	390
Inrush Current (A)	7.52
Inrush Duration (µs)	830
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	10
Max. Luminaires per 13A C Breaker	14
Max. Luminaires per 16A C Breaker	17
Max. Luminaires per 20A C Breaker	20

Insaver HO Topper LED II 175

Insaver HO Topper LED II 175 RO 15W NW
3033937

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	74000
Lifespan L90 B10	34000

Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	High-gloss
Nominal Product Length (mm)	195
Nominal Product Width (mm)	195
Nominal Product Height (mm)	55
Nominal Product Diameter (mm)	195
Cutout Dimensions (W x L in mm or Diameter in mm)	175
Weight (kg)	0.539
Recessed Depth (mm)	150

Packaging

Single packaging type	Carton
Product EAN number	8711971339373
Packaging single length / height (cm)	22.53
Packaging single width (cm)	22.83
Packaging single depth (cm)	6.17
DUN14 (outer)	18711971339370
Units per outer package	12
Packaging outer length / height (cm)	48.3
Packaging outer width (cm)	48.7
Packaging outer depth (cm)	21.9

Safety data

Optimal operating condition (°C)	-10-25
----------------------------------	--------

PHOTOMETRY


Insaver HO Topper LED II 175

Insaver HO Topper LED II 175 RO 15W NW
3033937

0.5	0.81 0.81	E(0°) E(C90) E(C0)	3313 780 774
1.0	1.62 1.63	E(0°) E(C90) E(C0)	828 196 184
1.5	2.43 2.44	E(0°) E(C90) E(C0)	358 87 86
2.0	3.24 3.25	E(0°) E(C90) E(C0)	207 49 48
2.5	4.05 4.06	E(0°) E(C90) E(C0)	133 31 31
3.0	4.86 4.88	E(0°) E(C90) E(C0)	82 22 22

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 78.2°)
— C90 - C270 (Half beam angle: 78.0°)

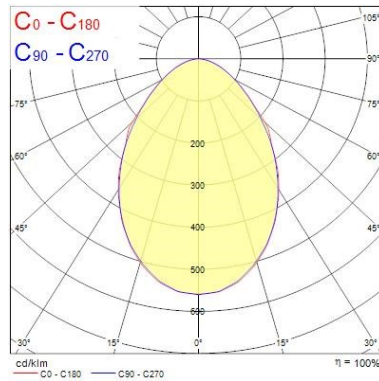

TECHNICAL DRAWINGS

